

SPDK NVMe-oF TCP (Target & Initiator)

Performance Report

Release 21.04

Testing Date: May 2021

Performed by:

Karol Latecki (karol.latecki@intel.com)

Maciej Wawryk (maciejx.wawryk@intel.com)

Acknowledgments:

James Harris (james.r.harris@intel.com)

John Kariuki (john.k.kariuki@intel.com)

Contents

Contents	2
Audience and Purpose.....	3
Test setup	4
Target Configuration.....	4
Initiator 1 Configuration.....	5
Initiator 2 Configuration.....	5
BIOS settings	6
TCP configuration	6
Kernel & BIOS spectre-meltdown information	6
Zero-copy send option	6
Introduction to SPDK NVMe-oF (Target & Initiator).....	7
Test Case 1: SPDK NVMe-oF TCP Target I/O core scaling	9
4KB Random Read Results	12
4KB Random Write Results	13
4KB Random Read-Write Results.....	14
Large Sequential I/O Performance.....	15
Conclusions	18
Test Case 2: SPDK NVMe-oF TCP Initiator I/O core scaling	19
4KB Random Read Results	22
4KB Random Write Results	23
4KB Random Read-Write Results.....	24
Conclusions	25
Test Case 3: Linux Kernel vs. SPDK NVMe-oF TCP Latency	26
SPDK vs Kernel NVMe-oF Target Results	29
SPDK vs Kernel NVMe-oF TCP Initiator Results.....	30
SPDK vs Kernel NVMe-oF Kernel + Initiator Results	31
Conclusions	32
Test Case 4: NVMe-oF Performance with increasing # of connections	33
4KB Random Read Results	35
4KB Random Write Results	36
4KB Random Read-Write Results.....	37
Low Connections Results	38
Conclusions	39
Summary	40
List of Figures	41
List of Tables	42
Appendix A – Test Case 1 SPDK NVMe-oF Initiator bdev configuration	44
Appendix B – Test Case 2 SPDK NVMe-oF Initiator bdev configuration	47
Appendix C – Test Case 3 SPDK NVMe-oF Initiator bdev configuration	51
Appendix D – Kernel NVMe-oF TCP Target configuration	51

Audience and Purpose

This report is intended for people who are interested in evaluating SPDK NVMe-oF (Target & Initiator) performance. This report contains SPDK NVMe-oF Target and Initiator performance characteristics and provides comparison data between SPDK and its Kernel NVMe-oF Target and Initiator counterparts. This report covers the TCP transport only.

The purpose of reporting these tests is not to imply a single “correct” approach, but rather to provide a baseline of well-tested configurations and procedures that produce repeatable results. This report can also be viewed as information regarding best known method/practice when performance testing SPDK NVMe-oF (Target & Initiator).

Test setup

Target Configuration

Table 1: Hardware setup configuration – Target system

Item	Description
Server Platform	SuperMicro SYS-2029U-TN24R4T   <div style="display: flex; justify-content: space-between;"> <div style="flex: 1;"> Integrated Board  </div> <div style="flex: 1;"> Super X11DPU </div> </div>
CPU	Intel® Xeon® Gold 6230 Processor (27.5MB L3, 2.10 GHz) Number of cores 20 per socket, number of threads 40 per socket (both sockets populated) Microcode: 0x5003003
Memory	12 x 32GB Hynix HMA84GR7AFR4N-VK, DDR4, 2666MHz Total of 384GB
Operating System	Fedora 33
BIOS	3.4
Linux kernel version	5.8.15-300.fc33.x86_64
SPDK version	SPDK 21.04
Storage	OS: 1x 120GB Intel SSDSC2BB120G4 Storage Target: 16x Intel® SSD DC P4610™ 1.6TB (FW: VDV10170) (8 on each CPU socket)
NIC	2x 100GbE Mellanox ConnectX-5 NICs. Both ports connected. 1 NIC per CPU socket.

Initiator 1 Configuration

Table 2: Hardware setup configuration – Initiator system 1

Item	Description
Server Platform	Intel® Server System R2208WFTZSR
CPU	Intel(R) Xeon(R) Gold 6252 CPU @ 2.10GHz (35.75MB Cache) Number of cores 24 per socket, number of threads 48 per socket (Both sockets populated) Microcode: 0x5003003
Memory	6 x 32GB Micron M393A1G40EB1-CRC, DDR4, 2933MHz Total 192GBs
Operating System	Fedora 33
BIOS	SE5C620.86B.02.01.0013.121520200651
Linux kernel version	5.8.15-300.fc33.x86_64
SPDK version	SPDK 21.04
Storage	OS: 1x 240GB INTEL SSDSC2BB240G6
NIC	1x 100GbE Mellanox ConnectX-5 Ex NIC. Both ports connected to Target server. (connected to CPU socket 0)

Initiator 2 Configuration

Table 3: Hardware setup configuration – Initiator system 2

Item	Description
Server Platform	Intel® Server System R2208WFTZSR
CPU	Intel(R) Xeon(R) Gold 6252 CPU @ 2.10GHz (35.75MB Cache) Number of cores 24 per socket, number of threads 48 per socket (Both sockets populated) Microcode: 0x5003003
Memory	6 x 32GB Micron M393A1G40EB1-CRC, DDR4, 2933MHz Total 192GBs
Operating System	Fedora 33
BIOS	SE5C620.86B.02.01.0013.121520200651
Linux kernel version	5.8.15-300.fc33.x86_64
SPDK version	SPDK 21.04
Storage	OS: 1x 240GB INTEL SSDSC2BB240G6
NIC	1x 100GbE Mellanox ConnectX-5 Ex NIC. Both ports connected to Target server. (connected to CPU socket 0)

BIOS settings

Table 4: Test systems BIOS settings

Item	Description
BIOS (Applied to all 3 systems)	Hyper threading Enabled CPU Power and Performance Policy: <ul style="list-style-type: none">• “Extreme Performance” for Target• “Performance” for Initiators CPU C-state No Limit CPU P-state Enabled Enhanced Intel® SpeedStep® Tech Enabled Turbo Boost Enabled

TCP configuration

Note that the SPDK NVMe-oF target and initiator use the Linux Kernel TCP stack. We tuned the Linux Kernel TCP stack for storage workloads over 100 Gbps NIC by settings the following parameters using sysctl:

```
# Set 256MB buffers
net.core.rmem_max = 268435456
net.core.wmem_max = 268435456
# Increase autotuning TCP buffer limits
# min, max and default settings
# auto-tuning allowed to 128MB
net.ipv4.tcp_rmem = 4096 87380 134217728
net.ipv4.tcp_wmem = 4096 65536 134217728
```

Kernel & BIOS spectre-meltdown information

All three server systems use kernel version available from DNF repository with default patches for spectre-meltdown issue enabled.

BIOS on all systems was updated to post spectre-meltdown versions as well.

Zero-copy send option

It should be noted that for this report zero-copy send option for SPDK NVMe-oF Target was explicitly enabled using SPDK RPC calls during the test's execution. Enabling this option allows for higher SPDK performance results and for easier comparison with previous SPDK NVMe-oF documents (20.07 and older), where this option was enabled by default.

Introduction to SPDK NVMe-oF (Target & Initiator)

The NVMe over Fabrics (NVMe-oF) protocol extends the parallelism and efficiencies of the NVMe Express* (NVMe) block protocol over network fabrics such as RDMA (iWARP, RoCE, InfiniBand™), Fibre Channel and TCP. SPDK provides both a user space NVMe-oF target and initiator that extends the software efficiencies of the rest of the SPDK stack over the network. The SPDK NVMe-oF target uses the SPDK user-space, polled-mode NVMe driver to submit and complete I/O requests to NVMe devices which reduces the software processing overhead. Likewise, it pins connections to CPU cores to avoid synchronization and cache thrashing so that the data for those connections is kept close to the CPU.

The SPDK NVMe-oF target and initiator uses the underlying transport layer API which in case of TCP are POSIX sockets. In case of RDMA-capable NICs Infiniband/RDMA verbs API is used which should work on all flavors of RDMA transports but is currently tested against RoCEv2 and iWARP NICs. Similar to the SPDK NVMe driver, SPDK provides a user-space, lockless, polled-mode NVMe-oF initiator. The host system uses the initiator to establish a connection and submit I/O requests to an NVMe subsystem within an NVMe-oF target. NVMe subsystems contain namespaces, each of which maps to a single block device exposed via SPDK's bdev layer. SPDK's bdev layer is a block device abstraction layer and general-purpose block storage stack akin to what is found in many operating systems. Using the bdev interface completely decouples the storage media from the front-end protocol used to access storage. Users can build their own virtual bdevs that provide complex storage services and integrate them with the SPDK NVMe-oF target with no additional code changes. There can be many subsystems within an NVMe-oF target and each subsystem may hold many namespaces. Subsystems and namespaces can be configured dynamically via a JSON-RPC interface.

Figure 1 shows a high-level schematic of the systems used for testing in the rest of this report. The set up consists of three systems (two used as initiators and one used as the target). The NVMe-oF target is connected to both initiator systems point-to-point using QSFP28 cables without any switches. The target system has sixteen Intel® SSD DC P4610 SSDs which were used as block devices for NVMe-oF subsystems and two 100GbE Mellanox ConnectX®-5 NICs connected to provide up to 200GbE of network bandwidth. Each Initiator system has one Mellanox ConnectX®-5 100GbE NIC connected directly to the target without any switch.

One goal of this report was to make clear the advantages and disadvantages inherent to the design of the SPDK NVMe-oF components. These components are written using techniques such as run-to completion, polling, and asynchronous I/O. The report covers four real-world use cases.

For performance benchmarking the fio tool is used with two storage engines:

- 1) Linux Kernel libaio engine
- 2) SPDK bdev engine

Performance numbers reported are aggregate I/O per second, average latency, and CPU utilization as a percentage for various scenarios. Aggregate I/O per second and average latency data is reported from fio and CPU utilization was collected using sar (systat).

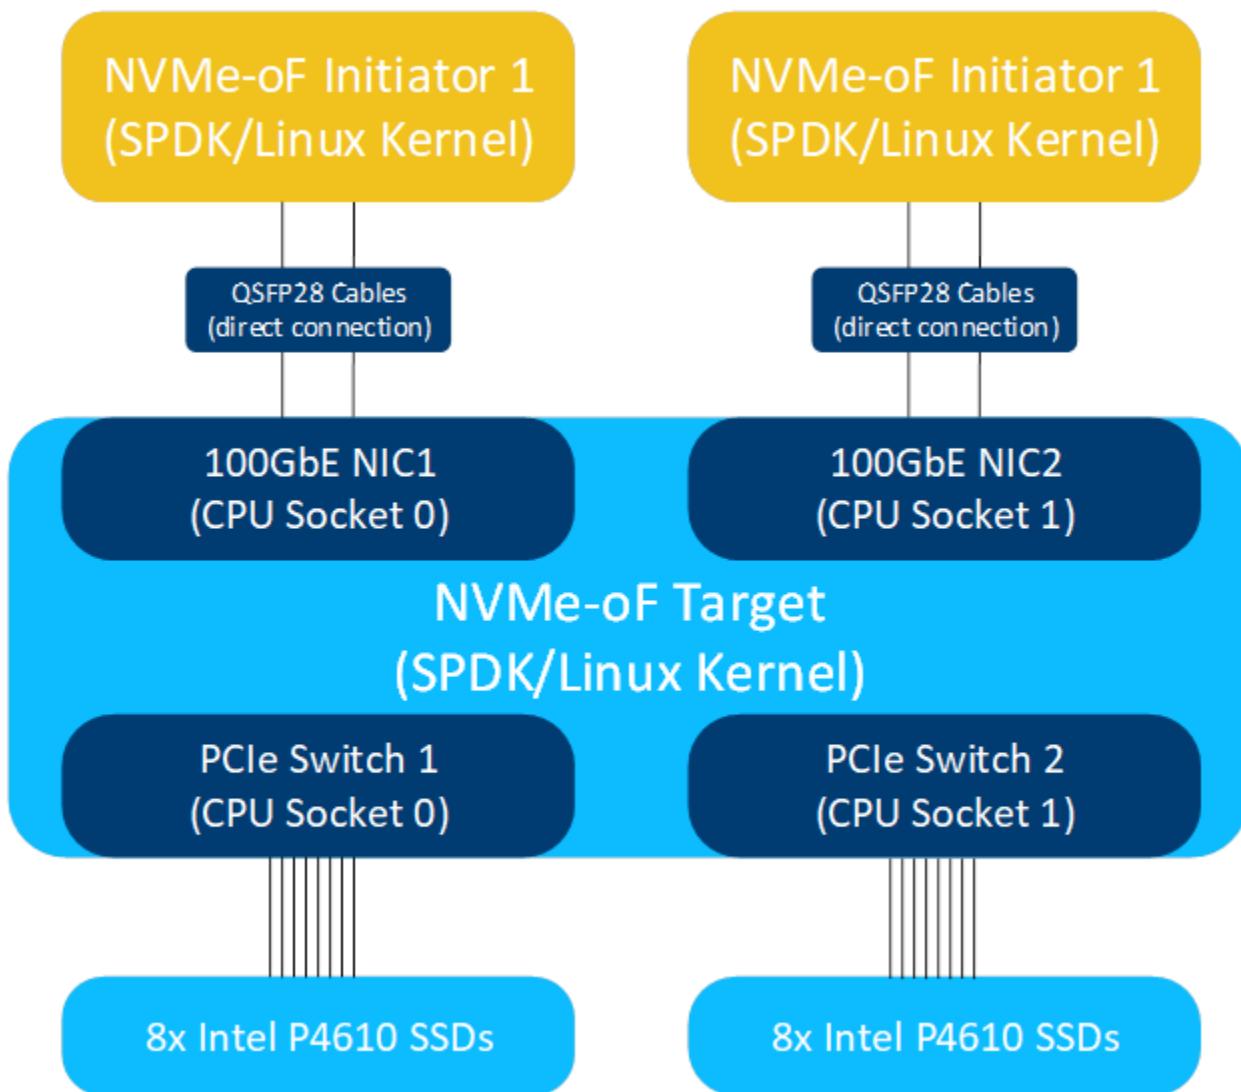


Figure 1: High-Level NVMe-oF TCP performance testing setup

Test Case 1: SPDK NVMe-oF TCP Target I/O core scaling

This test case was performed in order to understand the performance of SPDK TCP NVMe-oF target with I/O core scaling.

The SPDK NVMe-oF TCP target was configured to run with 16 NVMe-oF subsystems. Each NVMe-oF subsystem ran on top of an individual NVMe bdev backed by a single Intel P4610 device. Each of the 2 host systems was connected to 8 NVMe-oF subsystems which were exported by the SPDK NVMe-oF Target over 1x 100GbE NIC. The SPDK bdev FIO plugin was used to target 8 NVMe-oF bdevs on each of the host. The SPDK Target was configured to use 1, 4, 8, 12, 16, 24, 32 and 40 CPU cores. We ran the following workloads on each initiator:

- 4KB 100% Random Read
- 4KB 100% Random Write
- 4KB Random 70% Read 30% Write

We scaled the fio jobs using fio parameter numjob=3 in order to generate more I/O requests. When using the SPDK fio plugin it is important to note the difference between the fio I/O depth parameter and the NVMe device I/O depth because we can configure an fio job to send I/Os to more than one NVMe device and we can also scale the number of fio jobs using the numjobs parameter. The parameter values presented in the table below are actual queue depths used for each of the NVMe devices specified by the filename. These values were calculated in test based on number of fio job sections, numjobs parameter and the number of “filename” targets grouped in each of the fio job sections.

For detailed configuration please refer to the table below. The actual SPDK NVMe-oF configuration was done using JSON-RPC and the table contains the sequence of commands used by spdk/scripts/rpc.py script rather than a configuration file. The SPDK NVMe-oF Initiator (bdev fio_plugin) still uses plain configuration files.

Each workload was run three times at each CPU count and the reported results are the average of the 3 runs. For workloads which need preconditioning, 4KB rand read and 4KB 70% read 30% write we ran preconditioning once before running all of the workload to force the NVMe devices into a steady state so that we get consistent results.

Table 5: SPDK NVMe-oF TCP Target Core Scaling test configuration

Item	Description
Test Case	Test SPDK NVMe-oF Target I/O core scaling
SPDK NVMe-oF Target configuration	All the commands below were executed with spdk/scripts/rpc.py script. Enable zero-copy send on Target side before initializing all other subsystems: sock_impl_set_options -impl_name=posix -enable-zero-copy-send Construct NVMe bdevs: construct_nvme_bdev -t PCIe -b Nvme0 -a 0000:60:00.0 construct_nvme_bdev -t PCIe -b Nvme1 -a 0000:61:00.0 construct_nvme_bdev -t PCIe -b Nvme2 -a 0000:62:00.0

	<pre> construct_nvme_bdev -t PCIe -b Nvme3 -a 0000:63:00.0 construct_nvme_bdev -t PCIe -b Nvme4 -a 0000:64:00.0 construct_nvme_bdev -t PCIe -b Nvme5 -a 0000:65:00.0 construct_nvme_bdev -t PCIe -b Nvme6 -a 0000:66:00.0 construct_nvme_bdev -t PCIe -b Nvme7 -a 0000:67:00.0 construct_nvme_bdev -t PCIe -b Nvme8 -a 0000:b5:00.0 construct_nvme_bdev -t PCIe -b Nvme9 -a 0000:b6:00.0 construct_nvme_bdev -t PCIe -b Nvme10 -a 0000:b7:00.0 construct_nvme_bdev -t PCIe -b Nvme11 -a 0000:b8:00.0 construct_nvme_bdev -t PCIe -b Nvme12 -a 0000:b9:00.0 construct_nvme_bdev -t PCIe -b Nvme13 -a 0000:ba:00.0 construct_nvme_bdev -t PCIe -b Nvme14 -a 0000:bb:00.0 construct_nvme_bdev -t PCIe -b Nvme15 -a 0000:bc:00.0 Create a TCP transport: nvmf_create_transport -t TCP { "trtype": "TCP", "max_queue_depth": 128, "max_io_qpairs_per_ctrlr": 127, "in_capsule_data_size": 4096, "max_io_size": 131072, "io_unit_size": 131072, "max_aq_depth": 128, "num_shared_buffers": 4096, "buf_cache_size": 32, "dif_insert_or_strip": false, "c2h_success": true, "sock_priority": 0, "abort_timeout_sec": 1 } Create NVMe-oF subsystems and add NVMe bdevs as namespaces: for i in \$(seq 1 16); do nvmf_subsystem_create nqn.2018-09.io.spdk:cnode\${i}-s SPDK00\${i} -a -m 8 nvmf_subsystem_add_ns nqn.2018-09.io.spdk:cnode\${i} Nvme\$((i-1))n1 done Add listeners to NVMe-oF Subsystems: i=1 ips=(20.0.0.1 20.0.1.1 10.0.0.1 10.0.1.1) for ip in \${ips[@]}; do for j in \$(seq 1 4); do nvmf_subsystem_add_listener nqn.2018-09.io.spdk:cnode\${i} -t tcp \ -f ipv4 -s 4420 -a \${ip} ((i++)) done done </pre>
SPDK NVMe-oF Initiator - FIO plugin configuration	<p>BDEV.conf: See appendix A.</p> <p>FIO.conf</p> <pre> [global] ioengine=/tmp/spdk/examples/bdev/fio_plugin/fio_plugin spdk_conf=/tmp/spdk/bdev.conf thread=1 group_reporting=1 direct=1 norandommap=1 rw=randrw rwmixread={100, 70, 0} </pre>

```
bs=4k
iodepth={1, 64, 128, 192, 256}
time_based=1
numjobs=3
ramp_time=60
runtime=300
[filename0]
filename=NvmeOn1
[filename1]
filename=Nvme1n1
[filename2]
filename=Nvme2n1
[filename3]
filename=Nvme3n1
[filename4]
filename=Nvme4n1
[filename5]
filename=Nvme5n1
[filename6]
filename=Nvme6n1
[filename7]
filename=Nvme7n1
```

4KB Random Read Results

Table 6: SPDK NVMe-oF TCP Target Core Scaling results, Random Read IOPS, QD=128

# of Cores	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)
1 core	1876.93	480.5	4287.7
4 cores	7460.55	1909.9	1073.7
8 cores	15111.84	3868.6	528.2
12 cores	19055.81	4878.3	418.8
16 cores	20136.13	5154.8	395.8
24 cores	20775.25	5318.5	383.1
32 cores	20902.08	5350.9	380.8
40 cores	20995.17	5374.8	378.7



Figure 2: SPDK NVMe-oF TCP Target I/O core scaling: IOPS vs. Latency while running 4KB 100% Random Read workload at QD = 128

4KB Random Write Results

Disks were not preconditioned for this test case, which allows for higher IOPS numbers.

Table 7: SPDK NVMe-oF TCP Target Core Scaling results, Random Write IOPS, QD=192

# of Cores	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)
1 core	1122.95	287.5	10693.1
4 cores	4276.85	1094.9	2830.6
8 cores	7724.68	1977.5	1573.4
12 cores	11205.16	2868.5	1068.1
16 cores	13615.05	3485.4	880.4
24 cores	18859.66	4828.1	631.6
32 cores	19266.02	4932.1	617.4
40 cores	21373.52	5471.6	554.1

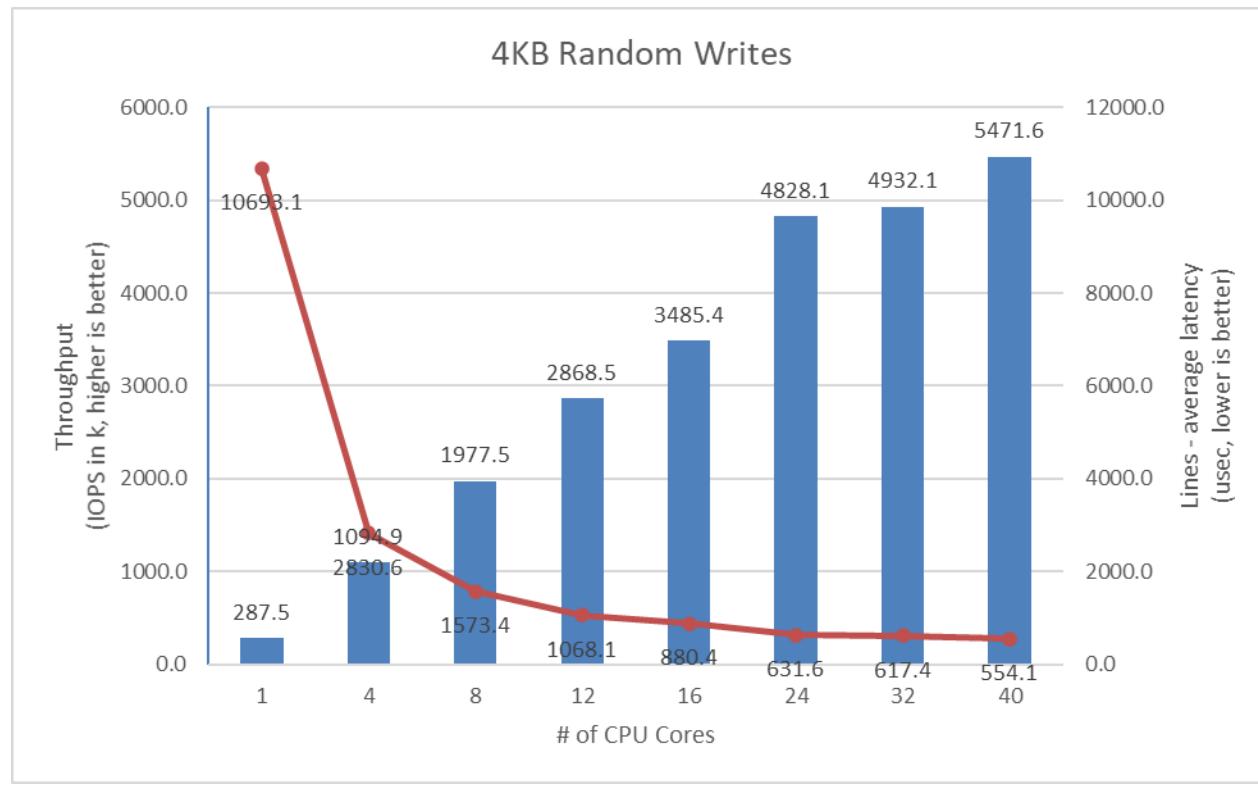


Figure 3: SPDK NVMe-oF TCP Target I/O core scaling: IOPS vs. Latency while running 4KB 100% Random Write Workload at QD=192

4KB Random Read-Write Results

Table 8: SPDK NVMe-oF TCP Target Core Scaling results, Random Read/Write 70%/30% IOPS, QD=192

# of Cores	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)
1 core	1403.16	359.2	8546.6
4 cores	5705.85	1460.7	2099.7
8 cores	11064.04	2832.4	1081.2
12 cores	16124.04	4127.7	740.7
16 cores	18445.30	4722.0	647.7
24 cores	22263.22	5699.4	535.0
32 cores	21187.81	5424.1	563.9
40 cores	22322.34	5714.5	533.0

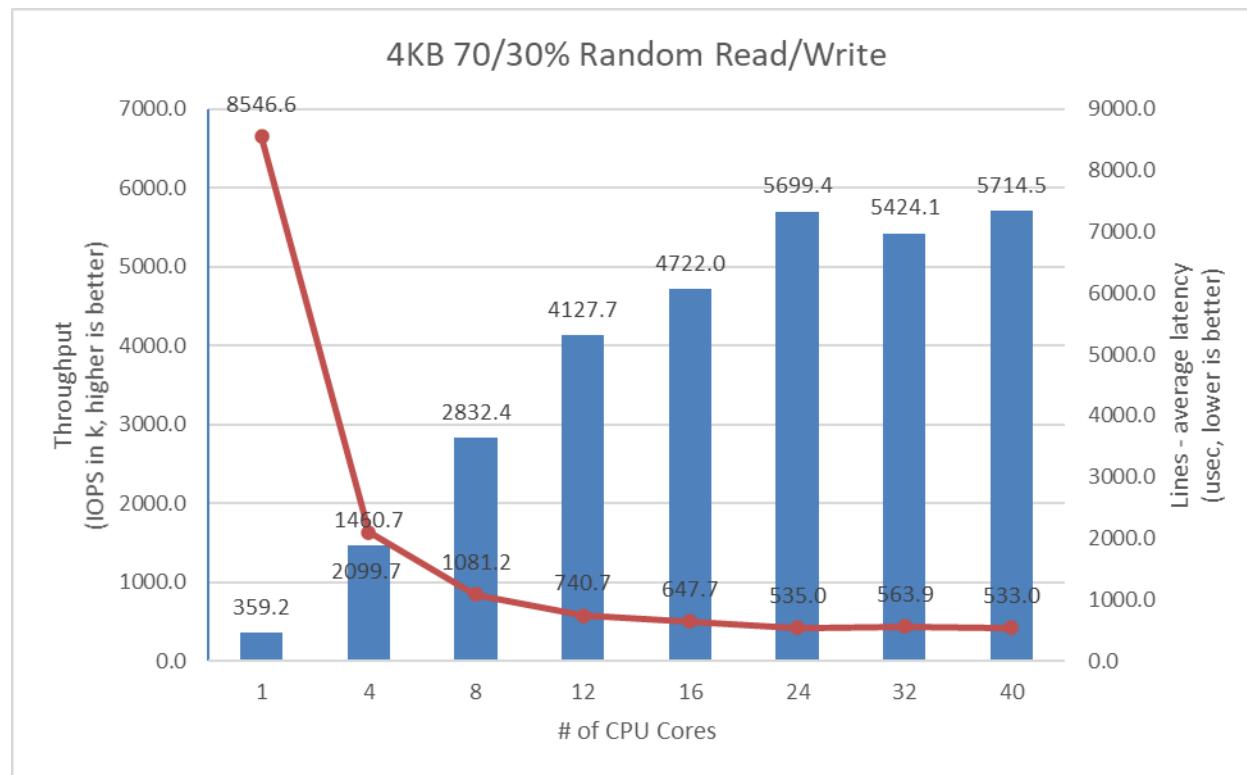


Figure 4: SPDK NVMe-oF TCP Target I/O core scaling: IOPS vs. Latency while running 4KB Random 70/30 Read/Write workload at QD=192

Large Sequential I/O Performance

We measured the performance of large block I/O workloads by performing sequential I/Os of size 128KBs at queue depth 8. We used iodepth=8 because higher queue depth resulted in negligible bandwidth gain and a significant increase in the latency. The rest of the FIO configuration is similar to the 4KB test case in the previous part of this document.

Table 9: SPDK NVMe-oF TCP Target Core Scaling results, 128KB Sequential Read IOPS, QD=8

# of Cores	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)
1 core	12092.40	96.7	1327.4
4 cores	23569.55	188.6	678.5
8 cores	23826.98	190.6	671.1
12 cores	23733.95	189.9	673.8
16 cores	23727.87	189.8	673.9
24 cores	23760.35	190.1	673.0
32 cores	23702.65	189.6	674.7
40 cores	23674.96	189.4	675.5

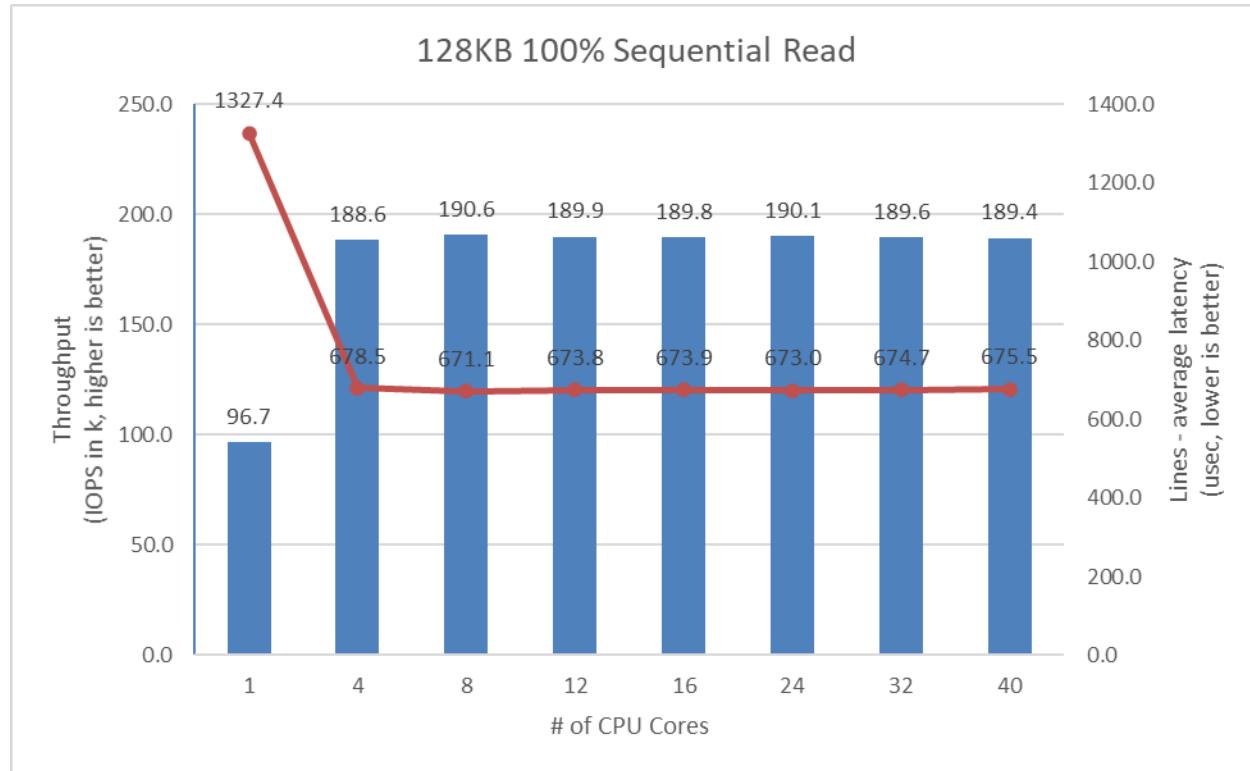


Figure 5: SPDK NVMe-oF TCP Target I/O core scaling: IOPS vs. Latency while running 128KB 100% Sequential Read Workload at QD=8 and initiator FIO numjobs=2

Table 10: SPDK NVMe-oF TCP Target Core Scaling results, 128KB Sequential Write IOPS, QD=8

# of Cores	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)
1 core	2461.47	19.7	6504.3
4 cores	8802.79	70.4	1818.2
8 cores	16875.95	135.0	948.4
12 cores	20421.61	163.4	785.0
16 cores	22631.72	181.1	706.7
24 cores	22389.98	179.1	715.2
32 cores	22381.85	179.1	714.6
40 cores	22348.46	178.8	718.9

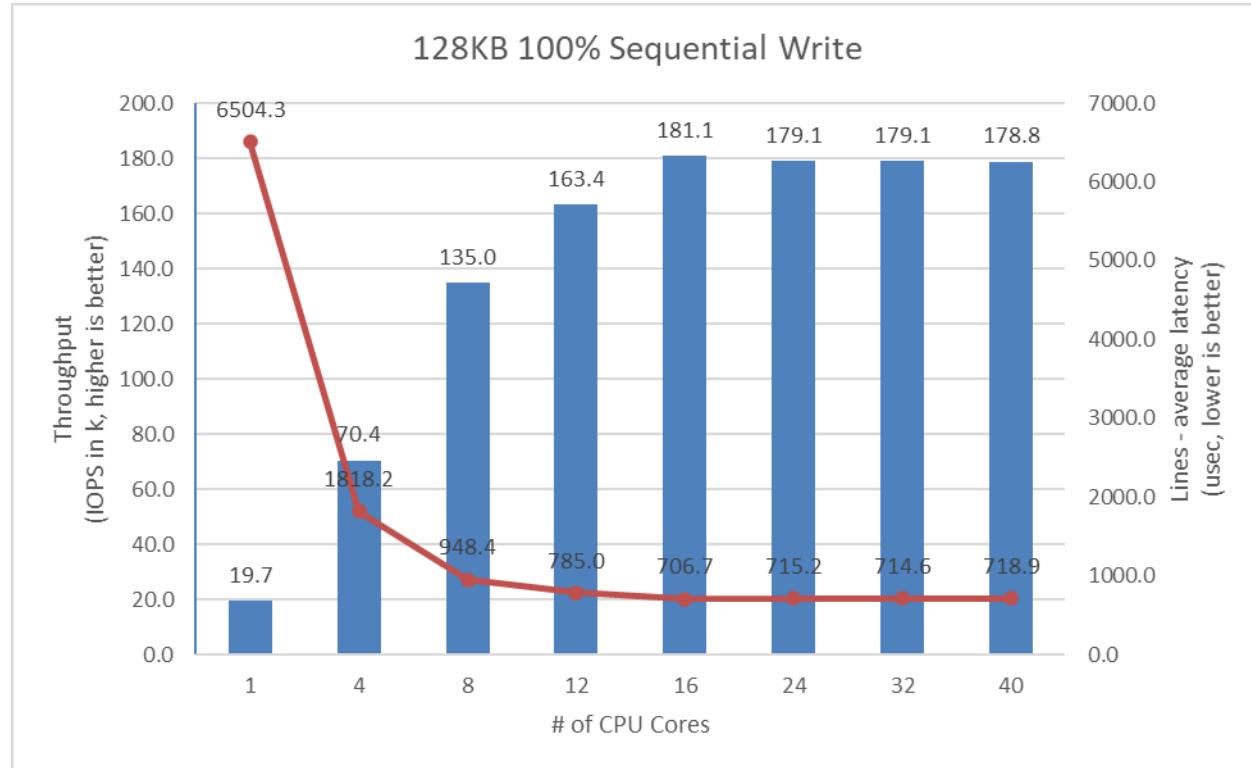


Figure 6: SPDK NVMe-oF TCP Target I/O core scaling: IOPS vs. Latency while running 128KB 100% Sequential Write Workload at QD=8 and Initiator FIO numjobs=2

Table 11: SPDK NVMe-oF TCP Target Core Scaling results, 128KB Sequential 70% Read 30% Write IOPS, QD=8

# of Cores	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)
1 core	4680.41	37.4	1714.0
4 cores	15417.57	123.3	518.8
8 cores	23159.17	185.3	345.2
12 cores	24765.32	198.1	323.9
16 cores	25267.75	202.1	316.4
24 cores	26007.24	208.1	307.8
32 cores	27619.92	221.0	289.4
40 cores	26241.86	209.9	306.3

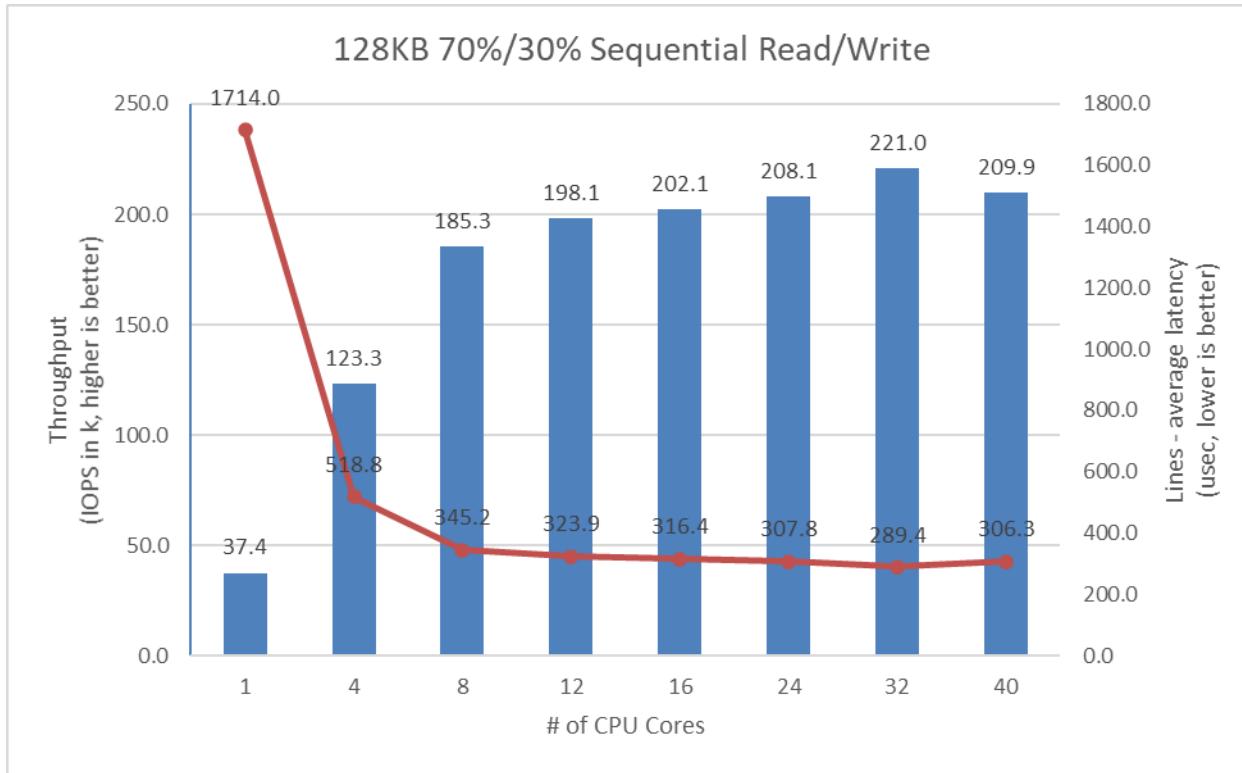


Figure 7: SPDK NVMe-oF TCP Target I/O core scaling: IOPS vs. Latency while running 128KB Sequential 70% Read 30% Write Workload at QD=8 and Initiator FIO numjobs=2

Conclusions

1. The SPDK NVMe-oF TCP Target IOPS throughput scales up linearly with addition of CPU cores for 4KB Random Read workload up to 8 CPU cores, reaching 120 GbE bandwidth. Adding more CPUs to Target configuration results in non-linear performance gains peaking at about 5.3 million IOPS at 24 CPU cores, almost completely saturating 200GbE network link.
2. For Random Write workload performance reaches 2.85 million IOPS, fully saturating a 100GbE link, at 12 CPU cores. It further scales linearly up to 24 CPU cores reaching 4.8 million IOPS. Beyond that point, performance scaling becomes nonlinear and reaches peak performance at 40CPU cores with 5.5 million IOPS.
3. Random Read-Write workload scales linearly up to 24 CPU cores with 5.7 million IOPS, saturating network link.
4. The best trade-off between CPU efficiency and network saturation is when the Target is configured with between 8 and 12 CPU cores. The performance we achieved with these configurations fully saturated a 100Gbps NIC connection between Target and Initiator for all tested workloads.
5. For the 4KB Random Write workload, we saturated the Network because we did not precondition the drives. If preconditioned, the NVMe drives would max out at about 3.2 million IOPS. Not preconditioning the drives allowed us to artificially increase their throughput and serve more IO requests than usual.
6. The throughput of large block workloads scaled up with addition of CPU cores reaching peak performance at different CPU core counts. For the 128K Sequential Reads workload, the peak throughput of 188 Gbps was observed at 4 CPU cores. For the 128K Sequential Writes, the throughput scaled linearly to 163 Gbps at 12 cores, however, beyond 12 cores the scaling was non-linear with a peak throughput of 180 Gbps observed at 16 CPU cores. For the 128K Sequential 70/30 Read/Write workload the scaling was linear up to 8 CPU cores, reaching 185 Gbps. Beyond 8 cores the scaling was not linear reaching to 200 Gbps.

Test Case 2: SPDK NVMe-oF TCP Initiator I/O core scaling

This test case was performed in order to understand the performance of SPDK NVMe-oF TCP Initiator as the number of CPU cores is scaled up.

The test setup for this test case is slightly different than the set up described in [introduction chapter](#), as we used just a single SPDK NVMe-oF TCP Initiator. The Initiator was connected to Target server with 100 Gbps network link.

The SPDK NVMe-oF TCP Target was configured similarly as in test case 1, using 20 cores. We used 20 CPU cores based on results of the previous test case which show that the target can easily serve over 3 million IOPS, that is enough IOPS to saturate 100 Gbps network connection

The SPDK bdev FIO plugin was used to target 16 individual NVMe-oF subsystems exported by the Target. The number of CPU threads used by the FIO process was managed by setting the FIO job sections and numjobs parameter and ranged from 1 to 40 CPUs. For detailed FIO job configuration see table below. FIO was run with following workloads:

- 4KB 100% Random Read
- 4KB 100% Random Write
- 4KB Random 70% Read 30% Write

It is important to note that fio IO Depth parameter values presented in the table below are actual queue depths used for each of the connected filename. These values were calculated in test based on number of fio job sections, numjobs parameter and the number of “filename” targets grouped in each of the fio job sections.

Table 12: SPDK NVMe-oF TCP Initiator Core Scaling test configuration

Item	Description
Test Case	Test SPDK NVMe-oF TCP Initiator I/O core scaling
SPDK NVMe-oF Target configuration	Same as in Test Case #1, using 20 CPU cores.
SPDK NVMe-oF Initiator 1 - FIO plugin configuration	<p>BDEV.conf See appendix B.</p> <p>FIO.conf For 1 CPU initiator configuration: [global] ioengine=/tmp/spdk/examples/bdev/fio_plugin/fio_plugin spdk_conf=/tmp/spdk/bdev.conf thread=1 group_reporting=1 direct=1 norandommap=1 rw=randrw</p>

	<pre> rwmixread={100, 70, 0} bs=4k iodepth={1,32, 64, 128, 192} time_based=1 ramp_time=60 runtime=300 numjobs=1 [filename0] filename=Nvme0n1 filename=Nvme1n1 filename=Nvme2n1 filename=Nvme3n1 filename=Nvme4n1 filename=Nvme5n1 filename=Nvme6n1 filename=Nvme7n1 filename=Nvme8n1 filename=Nvme9n1 filename=Nvme10n1 filename=Nvme11n1 filename=Nvme12n1 filename=Nvme13n1 filename=Nvme14n1 filename=Nvme15n1 </pre>
	<p>FIO.conf</p> <p>For X*4 CPU (up to 40) initiator configuration:</p> <pre> [global] ioengine=/tmp/spdk/examples/bdev/fio_plugin/fio_plugin spdk_conf=/tmp/spdk/bdev.conf thread=1 group_reporting=1 direct=1 norandommap=1 rw=randrw rwmixread={100, 70, 0} bs=4k iodepth={1, 32, 64, 128, 192} time_based=1 ramp_time=60 runtime=300 numjobs=X [filename0] filename=Nvme0n1 filename=Nvme1n1 filename=Nvme2n1 filename=Nvme3n1 [filename1] filename=Nvme4n1 filename=Nvme5n1 filename=Nvme6n1 filename=Nvme7n1 [filename2] filename=Nvme8n1 filename=Nvme9n1 filename=Nvme10n1 filename=Nvme11n1 [filename3] filename=Nvme12n1 </pre>

	filename=Nvme13n1 filename=Nvme14n1 filename=Nvme15n1
--	---

4KB Random Read Results

Table 13: SPDK NVMe-oF TCP Initiator Core Scaling results, 4KB Random Read IOPS, QD=128

# of Cores	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)
1 core	1437.54	368.0	5517.3
4 cores	5853.18	1498.4	1352.8
8 cores	10517.73	2692.5	745.4
12 cores	10886.87	2787.0	724.8
16 cores	10609.07	2715.9	746.4
24 cores	9862.94	2524.9	804.4
32 cores	8975.74	2297.8	887.9
40 cores	8860.95	2268.4	896.6

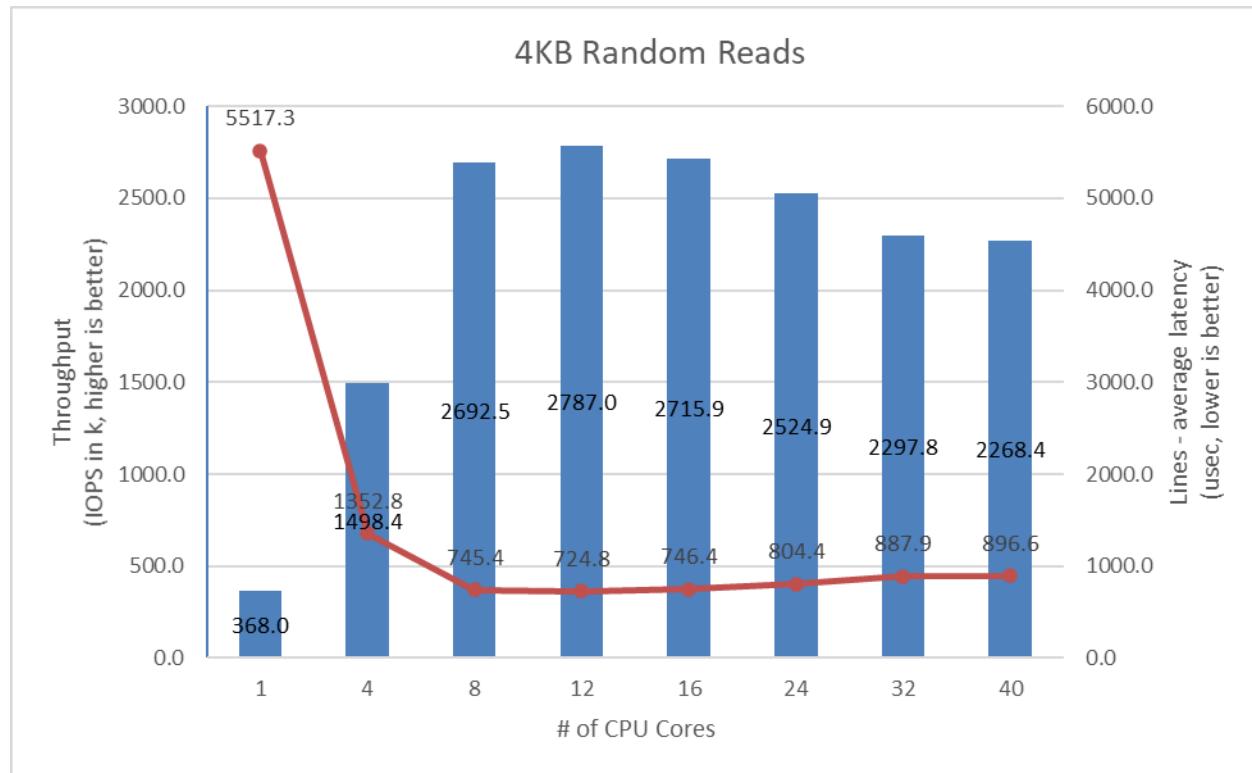


Figure 8: SPDK NVMe-oF TCP Initiator I/O core scaling: IOPS vs. Latency while running 4KB 100% Random Read QD=128 workload

4KB Random Write Results

Table 14: SPDK NVMe-oF TCP Initiator Core Scaling results, 4KB Random Write IOPS, QD=128

# of Cores	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)
1 core	2233.63	571.8	2183.1
4 cores	9232.76	2363.6	738.9
8 cores	10747.34	2751.3	725.8
12 cores	10435.53	2671.5	758.8
16 cores	10136.81	2595.0	782.9
24 cores	9480.63	2427.0	838.7
32 cores	9287.87	2377.7	858.7
40 cores	8871.67	2271.1	895.7

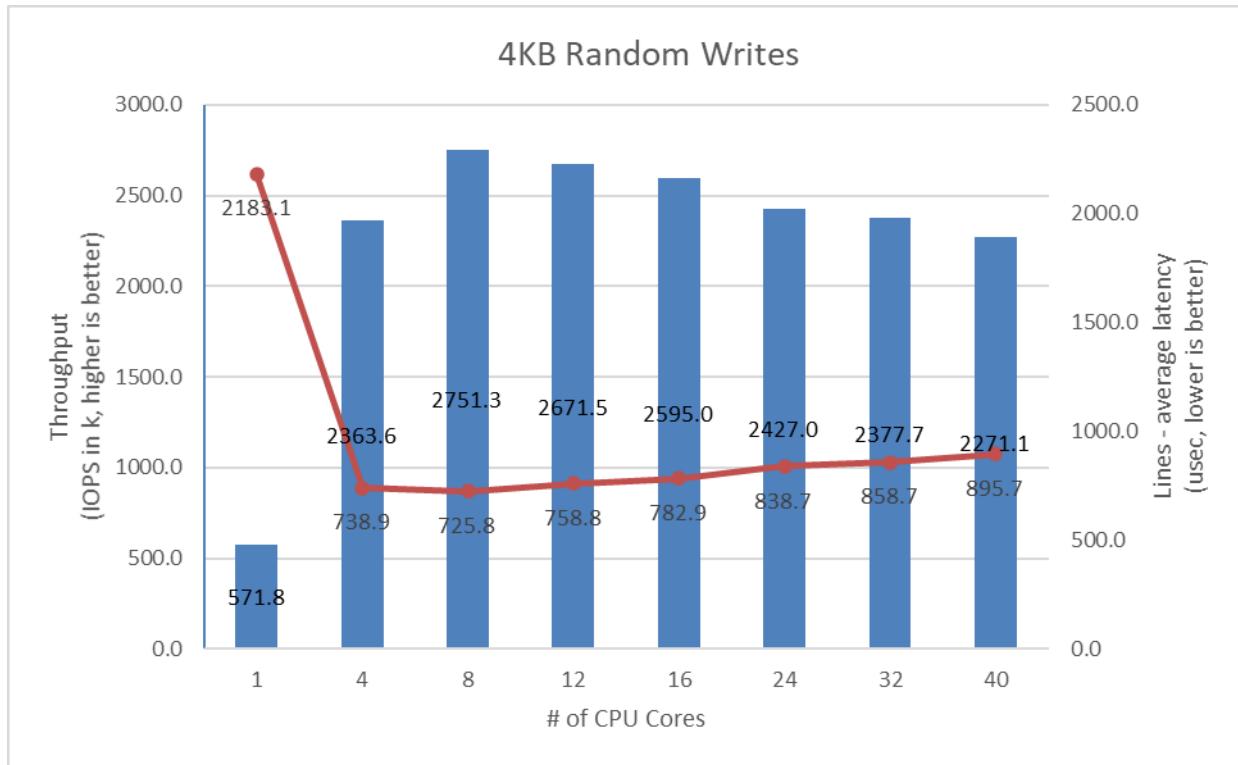


Figure 9: SPDK NVMe-oF TCP Initiator I/O core scaling: IOPS vs. Latency while running 4KB 100% Random Write Workload at QD=128

4KB Random Read-Write Results

Table 15: SPDK NVMe-oF TCP Initiator Core Scaling results, 4KB Random 70%/30% Read/Write IOPS, QD=64

# of Cores	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)
1 core	1675.48	428.9	2322.1
4 cores	6837.45	1750.4	569.0
8 cores	8878.07	2272.8	442.3
12 cores	9626.19	2464.3	407.0
16 cores	10011.07	2562.8	394.3
24 cores	10263.87	2627.5	389.4
32 cores	10232.50	2619.5	388.3
40 cores	10080.09	2580.5	400.6

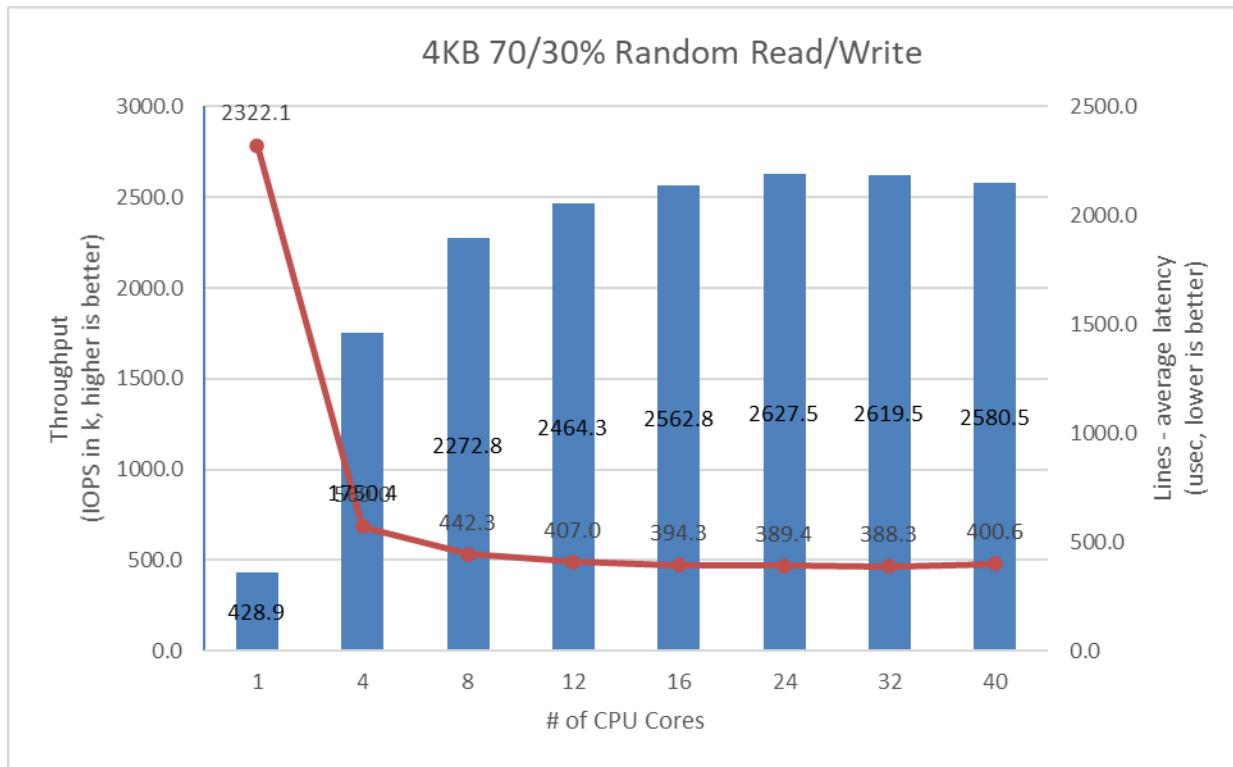


Figure 10: SPDK NVMe-oF TCP Initiator I/O core scaling: IOPS vs. Latency while running 4KB Random 70% Read 30% Write Workload at QD=64

Conclusions

1. For the 4KB Random Read workload, the SPDK NVMe-oF TCP Initiator performance scales linearly up to 8 CPU cores when the 100 Gbps network link is saturated. Increasing the number of CPU cores beyond 16 CPU cores results in performance degradation.
2. In case of 4KB Random Write workload, performance scales linearly up to 4 CPU cores and reaches peak performance of 2.75 million IOPS at 8 CPU cores saturating 100Gb link. Increasing the number of Initiator cores beyond 8 cores results in performance degradation.
3. Mixed Random Read-Write workload performance scales linearly up to 4 CPU cores, reaching 1.75 million IOPS. Increasing the number of cores results in non-linear performance improvement which peaks at 2.62 million IOPS at 24 CPU cores.

Test Case 3: Linux Kernel vs. SPDK NVMe-oF TCP Latency

This test case was designed to understand latency characteristics of SPDK NVMe-oF TCP Target and Initiator vs. the Linux Kernel NVMe-oF TCP Target and Initiator implementations on a single NVMe-oF subsystem. The average I/O latency and p99 latency was compared between SPDK NVMe-oF (Target/Initiator) vs. Linux Kernel (Target/Initiator). Both SPDK and Kernel NVMe-oF Targets were configured to run on a single core, with a single NVMe-oF subsystem on top of a *Null Block Device*. The null block device (bdev) was chosen as the backend block device to eliminate the media latency during these tests.

Table 16: Linux Kernel vs. SPDK NVMe-oF TCP Latency test configuration

Item	Description
Test Case	Linux Kernel vs. SPDK NVMe-oF Latency
SPDK NVMe-oF Target configuration	<p>All below commands are executed with spdk/scripts/rpc.py script.</p> <pre> nvmf_create_transport -t TCP (create TCP transport layer with default values: { "trtype": "TCP", "max_queue_depth": 128, "max_io_qpairs_per_ctrlr": 127, "in_capsule_data_size": 4096, "max_io_size": 131072, "io_unit_size": 131072, "max_aq_depth": 128, "num_shared_buffers": 4096, "buf_cache_size": 32, "dif_insert_or_strip": false, "c2h_success": true, "sock_priority": 0, "abort_timeout_sec": 1 } construct_null_bdev Nvme0n1 10240 4096 nvmf_subsystem_create nqn.2018-09.io.spdk:cnode1 -s SPDK001 -a -m 8 nvmf_subsystem_add_ns nqn.2018-09.io.spdk:cnode1 Nvme0n1 nvmf_subsystem_add_listener nqn.2018-09.io.spdk:cnode1 -t tcp -f ipv4 -s 4420 -a 20.0.0.1 </pre>
Kernel NVMe-oF Target configuration	<p>Target configuration file loaded using nvmet-clt tool.</p> <pre> { "ports": [{ "addr": { "adrfam": "ipv4", "traddr": "20.0.0.1", "trsvid": "4420", "trtype": "tcp" }, "portid": 1, "referrals": [], "subsystems": ["nqn.2018-09.io.spdk:cnode1"] }] } </pre>

```

        }
    ],
    "hosts": [],
    "subsystems": [
        {
            "allowed_hosts": [],
            "attr": {
                "allow_any_host": "1",
                "version": "1.3"
            },
            "namespaces": [
                {
                    "device": {
                        "path": "/dev/nullb0",
                        "uuid": "621e25d2-8334-4c1a-8532-b6454390b8f9"
                    },
                    "enable": 1,
                    "nsid": 1
                }
            ],
            "nqn": "nqn.2018-09.io.spdk:cnode1"
        }
    ]
}

```

FIO configuration

SPDK NVMe-oF Initiator FIO plugin configuration	<p>BDEV.conf See appendix C.</p> <p>FIO.conf</p> <pre>[global] ioengine=/tmp/spdk/examples/bdev/fio_plugin/fio_plugin spdk_conf=/tmp/spdk/bdev.conf thread=1 group_reporting=1 direct=1 norandommap=1 rw=randrw rwmixread={100, 70, 0} bs=4k iodepth=1 time_based=1 ramp_time=60 runtime=300 [filename0] filename=Nvme0n1</pre>
Kernel initiator configuration	<p>Device config Done using nvme-cli tool. modprobe nvme-fabrics nvme connect -n nqn.2018-09.io.spdk:cnode1 -t tcp -a 20.0.0.1 -s 4420</p> <p>FIO.conf</p> <pre>[global] ioengine=libaio thread=1 group_reporting=1 direct=1 norandommap=1 rw=randrw rwmixread={100, 70, 0} bs=4k</pre>

	<pre>iodepth=1 time_based=1 numjobs=1 ramp_time=60 runtime=300 [filename0] filename=/dev/nvme0n1</pre>
--	---

SPDK vs Kernel NVMe-oF Target Results

The following data was collected using the Linux Kernel initiator against both SPDK & Linux Kernel NVMe-oF TCP target.

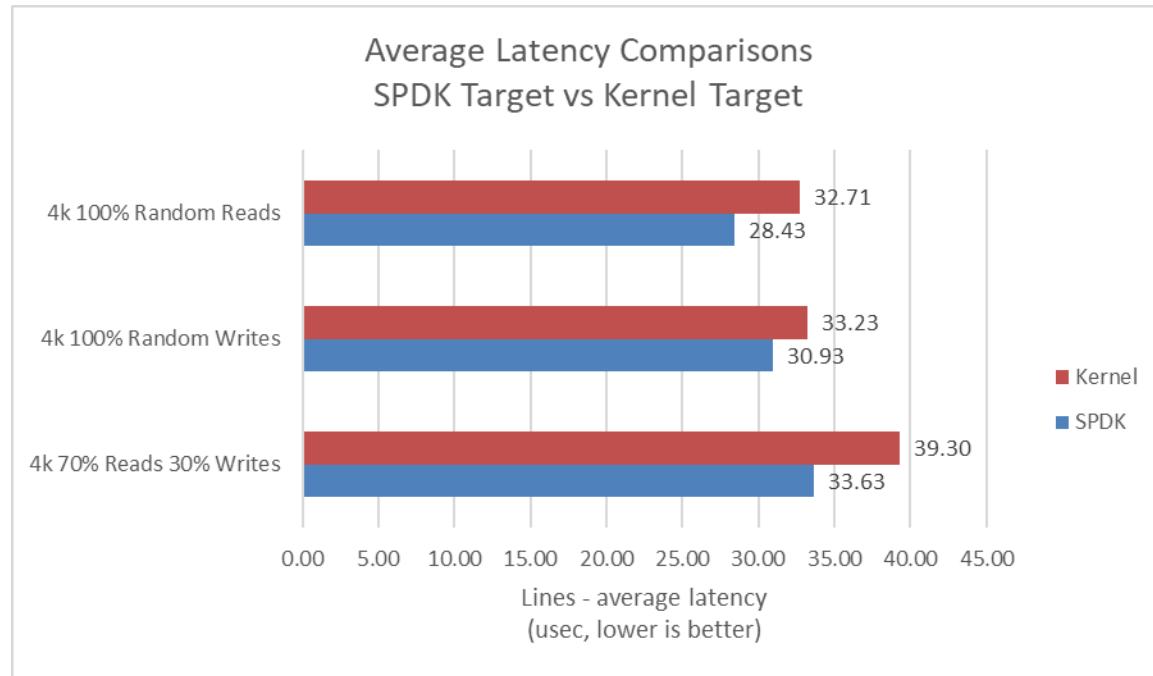


Figure 11: SPDK vs. Kernel NVMe-oF TCP Target Average I/O Latency for various workloads run using the Kernel Initiator

Table 17: SPDK NVMe-oF Target Latency and IOPS at QD=1, Null Block Device

Access Pattern	Avg. Latency (usec)	IOPS	p99 (usec)	p99.9 (usec)	p99.99 (usec)	p99.999 (usec)
4KB 100% Random Reads IOPS	28.43	34770	43.4	58.4	97.8	167.6
4KB 100% Random Writes IOPS	30.93	32351	46.5	70.8	108.4	170.3
4KB 100% Random 70% Reads 30% Writes IOPS	33.63	29385	73.4	112.7	134.2	175.8

Table 18: Linux Kernel NVMe-oF Target Latency and IOPS at QD=1, Null Block Device

Access Pattern	Avg. Latency (usec)	IOPS	p99 (usec)	p99.9 (usec)	p99.99 (usec)	p99.999 (usec)
4KB 100% Random Reads IOPS	32.71	30306	57.8	79.7	119.0	131.4
4KB 100% Random Writes IOPS	33.23	29778	56.1	113.5	123.4	133.3
4KB 100% Random 70% Reads 30% Writes IOPS	39.30	25108	83.5	120.5	140.7	190.1

SPDK vs Kernel NVMe-oF TCP Initiator Results

This following data was collected using Kernel & SPDK initiator against an SPDK target.

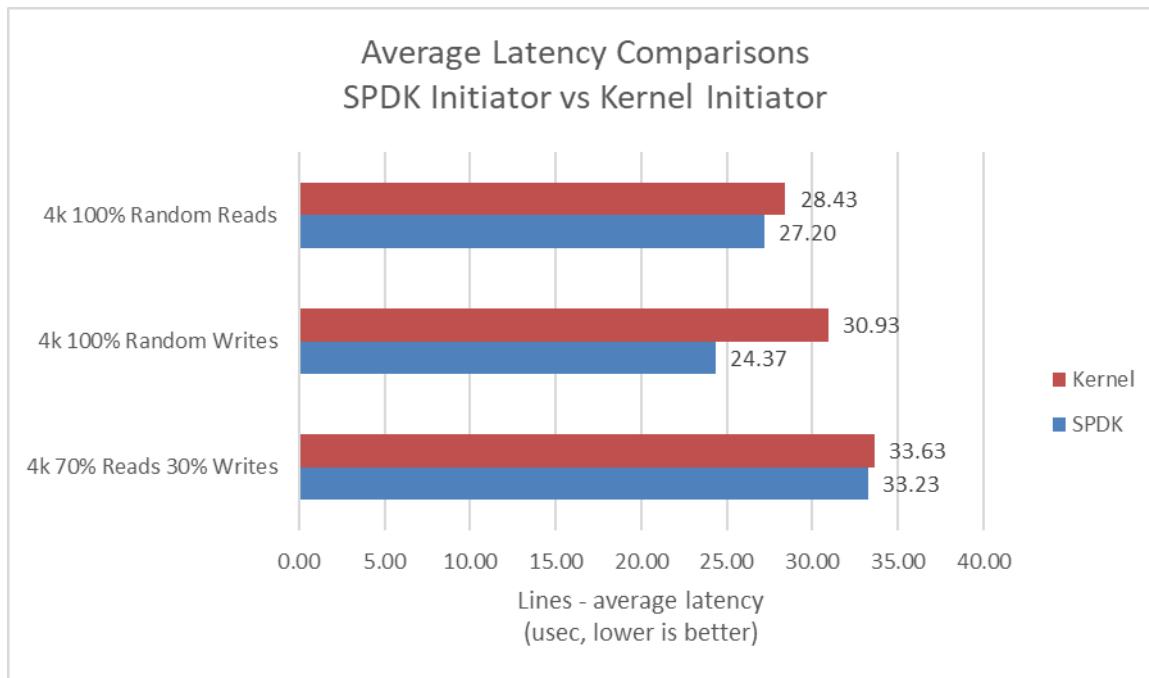


Figure 12: SPDK vs. Kernel NVMe-oF TCP Initiator Average I/O Latency for various workloads against SPDK Target

Table 19: SPDK NVMe-oF Initiator Latency and IOPS at QD=1, Null Block Device

Access Pattern	Avg. Latency (usec)	IOPS	p99 (usec)	p99.9 (usec)	p99.99 (usec)	p99.999 (usec)
4KB 100% Random Reads IOPS	27.20	36457	36.8	45.8	57.1	167.6
4KB 100% Random Writes IOPS	24.37	40852	34.3	40.9	61.7	167.6
4KB 100% Random 70% Reads 30% Writes IOPS	33.23	29952	70.3	109.5	141.9	176.7

Table 20: Linux Kernel NVMe-oF Initiator Latency and IOPS at QD=1, Null Block Device

Access Pattern	Avg. Latency (usec)	IOPS	p99 (usec)	p99.9 (usec)	p99.99 (usec)	p99.999 (usec)
4KB 100% Random Reads IOPS	28.43	34770	43.4	58.4	97.8	167.6
4KB 100% Random Writes IOPS	30.93	32351	46.5	70.8	108.4	170.3
4KB 100% Random 70% Reads 30% Writes IOPS	33.63	29385	73.4	112.7	134.2	175.8

SPDK vs Kernel NVMe-oF Kernel + Initiator Results

Following data was collected using SPDK Target with SPDK Initiator and Linux Target with Linux Initiator.

Table 21: SPDK NVMe-oF Latency and IOPS at QD=1, Null Block Device

Access Pattern	Avg. Latency (usec)	IOPS	p99 (usec)	p99.9 (usec)	p99.99 (usec)	p99.999 (usec)
4KB 100% Random Reads IOPS	27.20	36457	36.8	45.8	57.1	167.6
4KB 100% Random Writes IOPS	24.37	40852	34.3	40.9	61.7	167.6
4KB 100% Random 70% Reads 30% Writes IOPS	33.23	29952	70.3	109.5	141.9	176.7

Table 22: Linux Kernel NVMe-oF Latency and IOPS at QD=1, Null Block Device

Access Pattern	Avg. Latency (usec)	IOPS	p99 (usec)	p99.9 (usec)	p99.99 (usec)	p99.999 (usec)
4KB 100% Random Reads IOPS	32.71	30306	57.8	79.7	119.0	131.4
4KB 100% Random Writes IOPS	33.23	29778	56.1	113.5	123.4	133.3
4KB 100% Random 70% Reads 30% Writes IOPS	39.30	25108	83.5	120.5	140.7	190.1

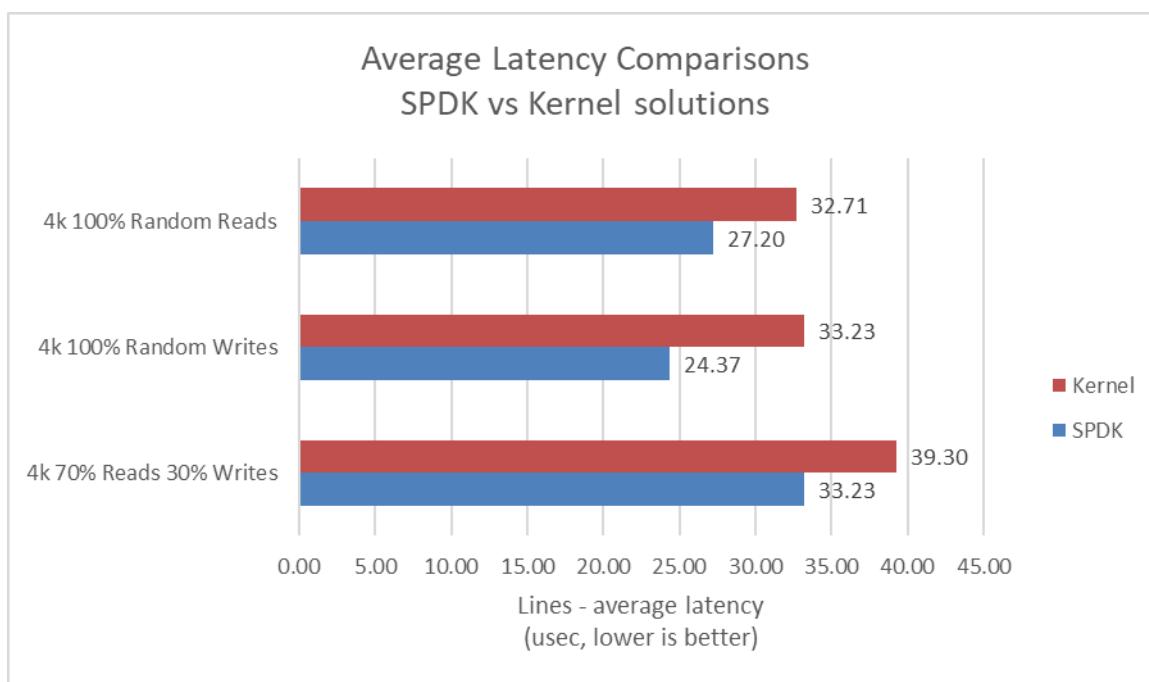


Figure 13: SPDK vs. Kernel NVMe-oF TCP solutions Average I/O Latency for various workloads

Conclusions

1. The SPDK NVMe-oF Target reduces the NVMe-oF average round trip I/O latency by up to 5.6 usec vs. the Linux Kernel NVMe-oF Target, which eliminates up to 14.4% NVMe-oF software overhead.
2. SPDK NVMe-oF Initiator reduces the average latency by up to 6.5 usec vs. the Linux Kernel NVMe-oF Initiator, which eliminates up to 21.2% NVMe-oF software overhead.
3. The SPDK NVMe-oF TCP target and initiator reduced the average latency by up to 26% vs. the Linux Kernel NVMe-oF target and initiator.

Test Case 4: NVMe-oF Performance with increasing # of connections

This test case was performed in order to understand throughput and latency capabilities of SPDK NVMe-oF Target vs. Linux Kernel NVMe-oF Target under increasing number of connections per subsystem. The number of connections (or I/O queue pairs) per NVMe-oF subsystem were varied and corresponding aggregated IOPS and number of CPU cores metrics were reported. The number of CPU cores metric was calculated from %CPU utilization measured using sar (systat package in Linux). The SPDK NVMe-oF Target was configured to run on 30 cores, 16 NVMe-oF subsystems (1 per Intel P4610) and 2 initiators were used both running I/Os to 8 separate subsystems using Kernel NVMe-oF initiator. We ran the following workloads on the host systems:

- 4KB 100% Random Read
- 4KB 100% Random Write
- 4KB Random 70% Read 30% Write

Table 23: NVMe-oF Performance with increasing number of connections test configuration

Item	Description
Test Case	NVMe-oF Target performance under varying # of connections
SPDK NVMe-oF Target configuration	Same as in Test Case #1, using 30 CPU cores.
Kernel NVMe-oF Target configuration	Target configuration file loaded using nvmet-clt tool. For detail configuration file contents please see Appendix D .
Kernel NVMe-oF Initiator #1	Device config Performed using nvme-clt tool. modprobe nvme-fabrics nvme connect -n nqn.2018-09.io.spdk:cnode1 -t tcp -a 20.0.0.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode2 -t tcp -a 20.0.0.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode3 -t tcp -a 20.0.0.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode4 -t tcp -a 20.0.0.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode5 -t tcp -a 20.0.1.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode6 -t tcp -a 20.0.1.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode7 -t tcp -a 20.0.1.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode8 -t tcp -a 20.0.1.1 -s 4420
Kernel NVMe-oF Initiator #2	Device config Performed using nvme-clt tool. modprobe nvme-fabrics nvme connect -n nqn.2018-09.io.spdk:cnode9 -t tcp -a 10.0.0.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode10 -t tcp -a 10.0.0.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode11 -t tcp -a 10.0.0.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode12 -t tcp -a 10.0.0.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode13 -t tcp -a 10.0.1.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode14 -t tcp -a 10.0.1.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode15 -t tcp -a 10.0.1.1 -s 4420 nvme connect -n nqn.2018-09.io.spdk:cnode16 -t tcp -a 10.0.1.1 -s 4420
FIO configuration (used on both initiators)	FIO.conf [global] ioengine=libaio

	thread=1 group_reporting=1 direct=1 norandommap=1 rw=randrw rwmixread={100, 70, 0} bs=4k iodepth={8, 32, 64, 128} time_based=1 ramp_time=60 runtime=300 numjobs={1, 4, 16} [filename1] filename=/dev/nvme0n1 [filename2] filename=/dev/nvme1n1 [filename3] filename=/dev/nvme2n1 [filename4] filename=/dev/nvme3n1 [filename5] filename=/dev/nvme4n1 [filename6] filename=/dev/nvme5n1 [filename7] filename=/dev/nvme6n1 [filename8] filename=/dev/nvme7n1
--	---

The number of CPU cores used while running the SPDK NVMe-oF target was 30, whereas for the case of Linux Kernel NVMe-oF target there was no CPU core limitation applied.

The metrics in the graph represent relative efficiency in IOPS/core which was calculated based on total aggregate IOPS divided by total CPU cores used while running that specific workload. For the case of Kernel NVMe-oF target, total CPU cores was calculated from % CPU utilization which was measured using sar utility in Linux.

4KB Random Read Results

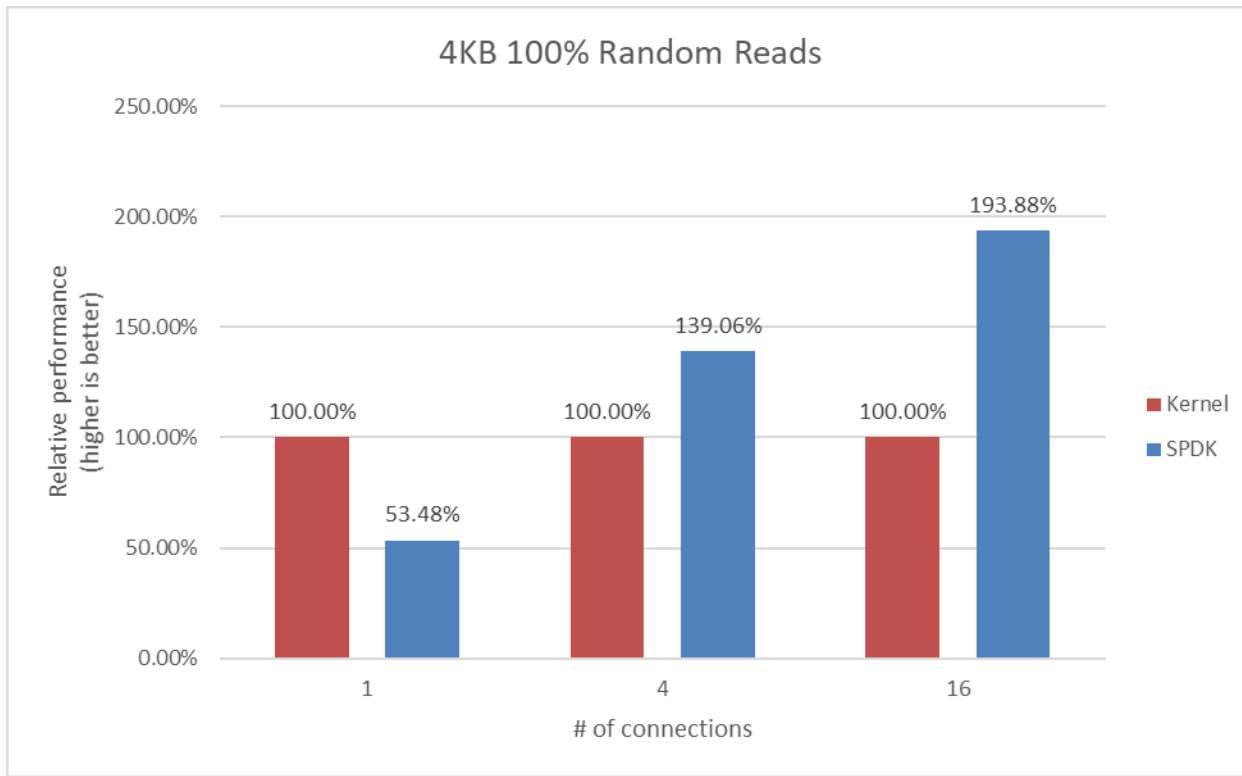


Figure 14: Relative Efficiency Comparison of Linux Kernel vs. SPDK NVMe-oF Target IOPS/Core for 4KB 100% Random Reads QD=128 using the Kernel Initiator

Table 24: Linux Kernel NVMe-oF TCP Target: 4KB 100% Random Reads, QD=128

Connections per subsystem	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)	# CPU Cores
1	9974.87	2553.6	802.2	14.6
4	15706.51	4020.9	508.8	39.7
16	13045.80	3339.7	613.2	56.4

Table 25: SPDK NVMe-oF TCP Target: 4KB 100% Random Reads, QD=128

Connections per subsystem	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)	# CPU Cores
1	10967.93	2807.8	729.1	30.0
4	16502.11	4224.5	484.4	30.0
16	13451.29	3443.5	594.5	30.0

4KB Random Write Results

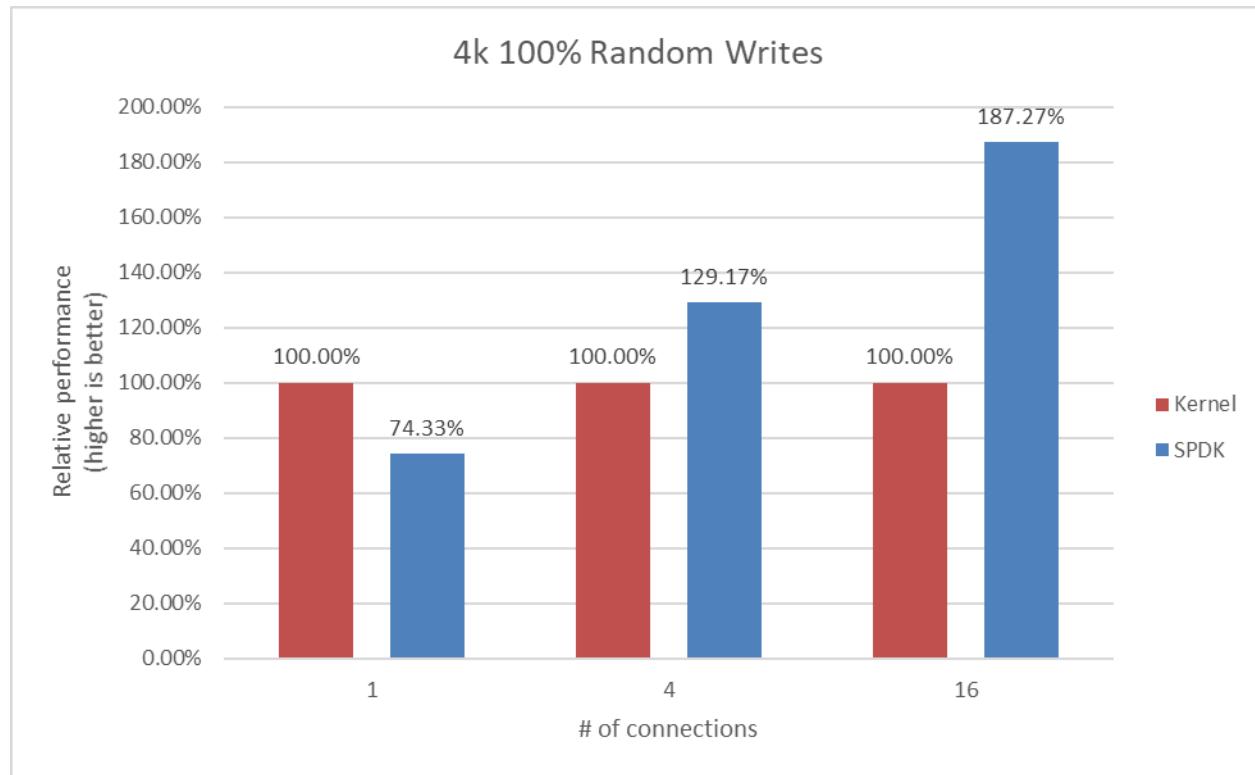


Figure 15: Relative Efficiency Comparison of Linux Kernel vs. SPDK NVMe-oF Target IOPS/Core for 4KB 100% Random Writes QD=128 using the Kernel Initiator

Note: Drives were not pre-conditioned while running 100% Random write I/O Test

Table 26: Linux Kernel NVMe-oF TCP Target: 4KB 100% Random Writes, QD=128

Connections per subsystem	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)	# CPU Cores
1	9580.53	2452.6	834.9	18.1
4	15228.86	3898.6	527.4	41.3
16	14703.13	3764.0	543.6	59.8

Table 27: SPDK NVMe-oF TCP Target: 4KB 100% Random Writes, QD=128

Connections per subsystem	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)	# CPU Cores
1	11821.23	3026.2	676.6	30.0
4	14284.01	3656.7	563.1	30.0
16	13824.39	3539.0	578.3	30.0

4KB Random Read-Write Results

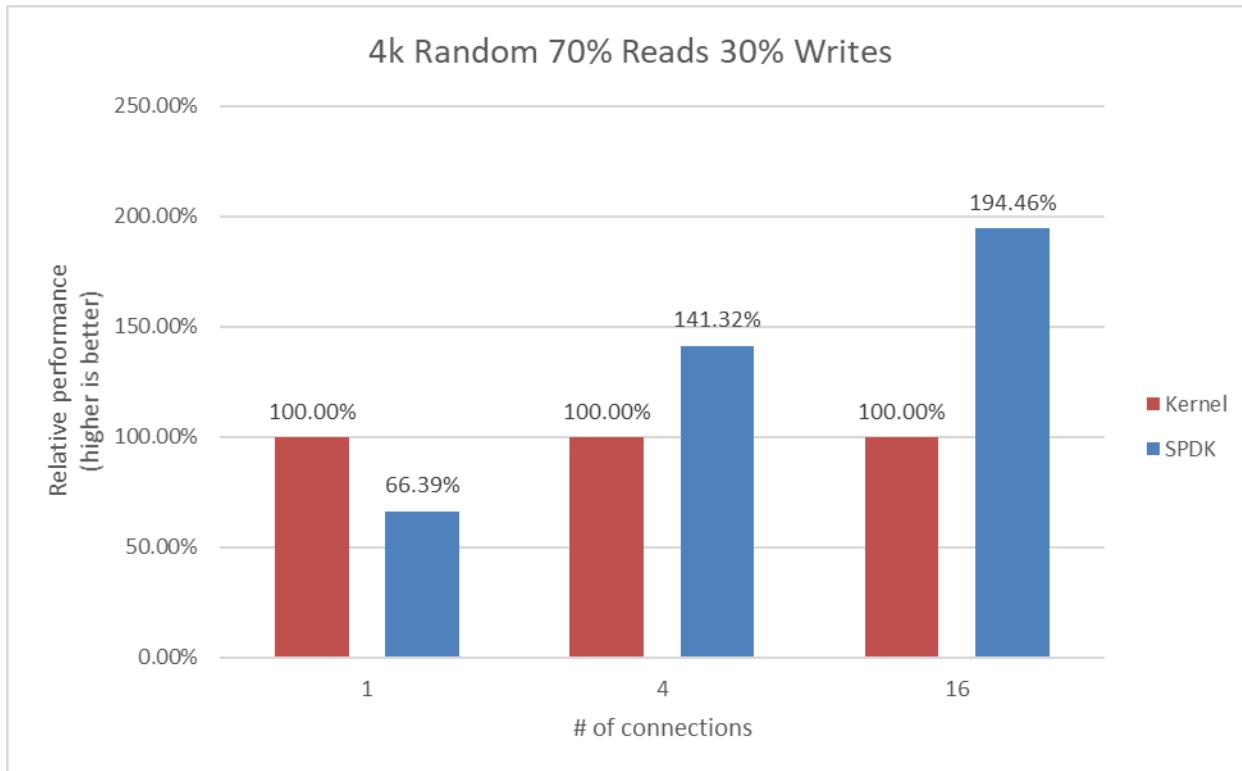


Figure 16: Relative Efficiency Comparison of Linux Kernel vs. SPDK NVMe-oF Target IOPS/Core for 4KB Random 70% Reads 30% Writes QD=128 using Kernel Initiator

Table 28: Linux Kernel NVMe-oF TCP Target: 4KB 70% Random Read 30% Random Write, QD=128

Connections per subsystem	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)	# CPU Cores
1	10517.15	2692.4	761.2	17.2
4	15560.65	3983.5	513.6	43.0
16	14154.16	3623.5	564.3	61.1

Table 29: SPDK NVMe-oF TCP Target: 4KB 70% Random Read 30% Random Write, QD=128

Connections per subsystem	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)	# CPU Cores
1	12152.75	3111.1	658.1	30.0
4	15337.90	3926.5	521.1	30.0
16	13523.57	3462.0	591.0	30.0

Low Connections Results

During testing it was observed that relative efficiency of SPDK Target is about 40% of Kernel Target because SPDK uses a fixed number of CPU cores that was configured at start up and does not have a mechanism to decrease the number of I/O cores on the fly if the SPDK target does not need all of the CPU resources.

The test cases with 1 connection per subsystems were re-run with SPDK using only 4 CPU cores.

Table 30: SPDK & Kernel NVMe-oF TCP Target relative efficiency comparison for various workloads, QD=64, 1 connection per subsystem

Workload	Target	Bandwidth (MBps)	Throughput (IOPS k)	Avg. Latency (usec)	# CPU Cores
Random Read	Linux	8141.97	2084.3	491.1	13.5
	SPDK	5641.54	1444.2	709.1	4.0
Random Write	Linux	8636.55	2211.0	463.0	16.7
	SPDK	4150.62	1062.6	963.6	4.0
Random Read/Write	Linux	8135.70	2082.7	491.6	15.3
	SPDK	4436.43	1135.7	901.5	4.0

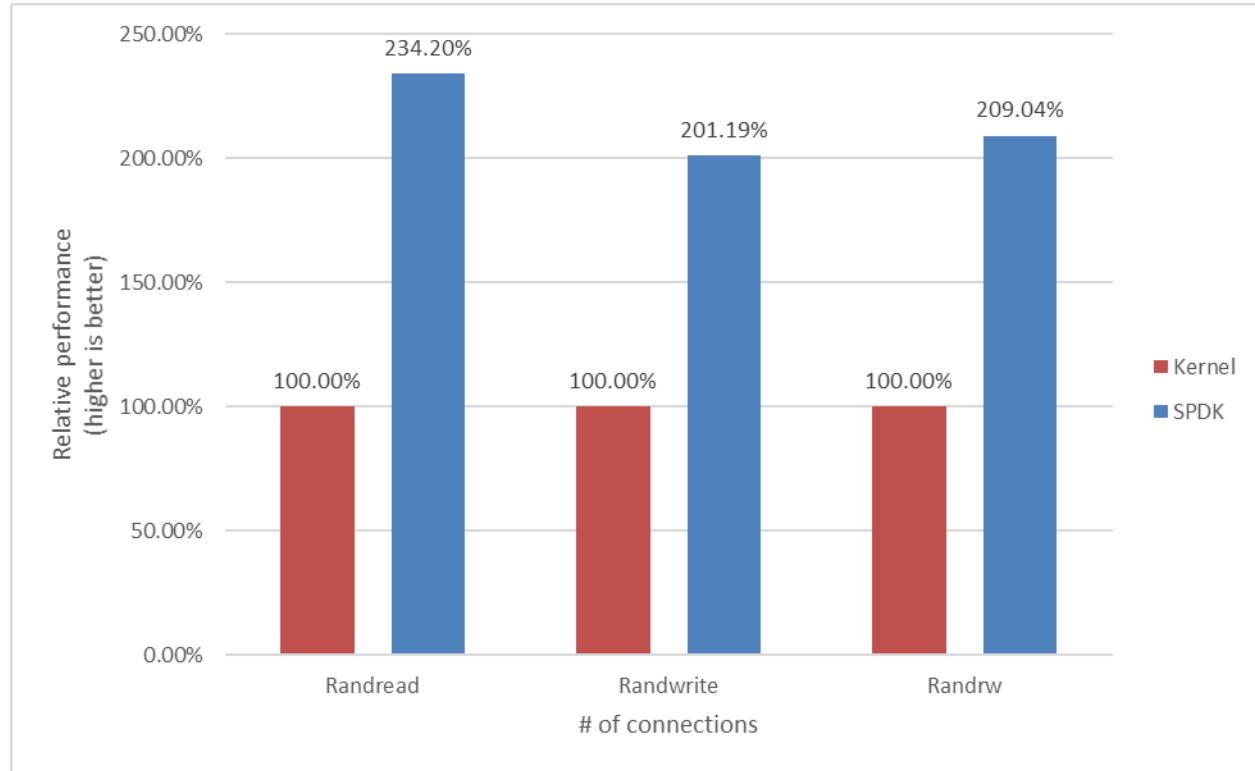


Figure 17: Relative Efficiency Comparison of Linux Kernel vs. SPDK NVMe-oF Target IOPS/Core for various workloads, 1 connection per subsystem and reduced number of SPDK Target CPU Cores (4)

Conclusions

1. The Linux Kernel NVMe-oF TCP target relative efficiency in IOPS/Core was better than SPDK when there was just one connection per subsystem because the SPDK NVMe-oF target uses a fixed number of CPU cores and there is no mechanism to dynamically decrease the number of CPU cores if the target does not need all the cores. Therefore, we re-run the test cases with 1 connections per subsystem but lowered the number of I/O cores used by the SPDK Target to 4 and added the results to the tables which show a relative performance up to 2.0-2.3x times better than Linux Kernel NVMe-oF TCP target.
2. The performance peaked for all workloads for both SPDK and Kernel NVMe-oF TCP Targets at 4 connections per subsystem.
3. The SPDK NVMe-oF TCP target relative efficiency in IOPS/Core was about 1.3x times better than the Linux Kernel NVMe-oF target at 4 connections per NVMe-oF subsystem about 1.9x times better at 16 connections per NVMe-oF subsystem.

Summary

This report showcased performance results with SPDK NVMe-oF TCP target and initiator under various test cases, including:

- I/O core scaling
- Average I/O latency
- Performance with increasing number of connections per subsystems

It compared performance results while running Linux Kernel NVMe-oF (Target/Initiator) against the accelerated polled-mode driven SPDK NVMe-oF (Target/Initiator) implementation.

Throughput scales up and latency decreases almost linearly with the scaling of SPDK NVMe-oF target I/O cores when serving 4KB random workloads. The SPDK NVMe-oF target saturates a 100 Gbps network link using just 8 CPU cores for the 4KB Random Read and 4KB Random Read/Write 70/30 workloads, and 12 CPU cores for the 4KB Random Write workload. The IOPS scalability remains close to linear for all workloads until the results are close to saturating network 200 Gbps link.

For the SPDK NVMe-oF TCP Initiator, the IOPS throughput scales almost linearly with addition of CPU cores until the network was almost saturated. Further increasing the number of CPU cores results in performance degradation. A single initiator was able to saturate a 100Gb link.

For the NVMe-oF TCP latency comparison, the SPDK NVMe-oF Target and Initiator average latency is up to about 15% and 22% lower than their Linux Kernel counterparts respectively when testing against null block device-based backend.

The SPDK NVMe-oF TCP Target performed up to 1.9 times better w.r.t IOPS/core than Linux Kernel NVMe-oF target while running 4KB 100% Random Read workload with increasing number of connections per NVMe-oF subsystem.

This report provides information regarding methodologies and practices while benchmarking NVMe-oF using SPDK, as well as the Linux Kernel. It should be noted that the performance data showcased in this report is based on specific hardware and software configurations and that performance results may vary depending on the hardware and software configurations.

List of Figures

Figure 1: High-Level NVMe-oF TCP performance testing setup	8
Figure 2: SPDK NVMe-oF TCP Target I/O core scaling: IOPS vs. Latency while running 4KB 100% Random Read workload at QD = 128	12
Figure 3: SPDK NVMe-oF TCP Target I/O core scaling: IOPS vs. Latency while running 4KB 100% Random Write Workload at QD=192	13
Figure 4: SPDK NVMe-oF TCP Target I/O core scaling: IOPS vs. Latency while running 4KB Random 70/30 Read/Write workload at QD=192	14
Figure 5: SPDK NVMe-oF TCP Target I/O core scaling: IOPS vs. Latency while running 128KB 100% Sequential Read Workload at QD=8 and initiator FIO numjobs=2.....	15
Figure 6: SPDK NVMe-oF TCP Target I/O core scaling: IOPS vs. Latency while running 128KB 100% Sequential Write Workload at QD=8 and Initiator FIO numjobs=2.....	16
Figure 7: SPDK NVMe-oF TCP Target I/O core scaling: IOPS vs. Latency while running 128KB Sequential 70% Read 30% Write Workload at QD=8 and Initiator FIO numjobs=2.....	17
Figure 8: SPDK NVMe-oF TCP Initiator I/O core scaling: IOPS vs. Latency while running 4KB 100% Random Read QD=128 workload	22
Figure 9: SPDK NVMe-oF TCP Initiator I/O core scaling: IOPS vs. Latency while running 4KB 100% Random Write Workload at QD=128	23
Figure 10: SPDK NVMe-oF TCP Initiator I/O core scaling: IOPS vs. Latency while running 4KB Random 70% Read 30% Write Workload at QD=64	24
Figure 11: SPDK vs. Kernel NVMe-oF TCP Target Average I/O Latency for various workloads run using the Kernel Initiator	29
Figure 12: SPDK vs. Kernel NVMe-oF TCP Initiator Average I/O Latency for various workloads against SPDK Target	30
Figure 13: SPDK vs. Kernel NVMe-oF TCP solutions Average I/O Latency for various workloads	31
Figure 14: Relative Efficiency Comparison of Linux Kernel vs. SPDK NVMe-oF Target IOPS/Core for 4KB 100% Random Reads QD=128 using the Kernel Initiator.....	35
Figure 15: Relative Efficiency Comparison of Linux Kernel vs. SPDK NVMe-oF Target IOPS/Core for 4KB 100% Random Writes QD=128 using the Kernel Initiator	36
Figure 16: Relative Efficiency Comparison of Linux Kernel vs. SPDK NVMe-oF Target IOPS/Core for 4KB Random 70% Reads 30% Writes QD=128 using Kernel Initiator.....	37
Figure 17: Relative Efficiency Comparison of Linux Kernel vs. SPDK NVMe-oF Target IOPS/Core for various workloads, 1 connection per subsystem and reduced number of SPDK Target CPU Cores (4).38	

List of Tables

Table 1: Hardware setup configuration – Target system	4
Table 2: Hardware setup configuration – Initiator system 1	5
Table 3: Hardware setup configuration – Initiator system 2	5
Table 4: Test systems BIOS settings	6
Table 5: SPDK NVMe-oF TCP Target Core Scaling test configuration.....	9
Table 6: SPDK NVMe-oF TCP Target Core Scaling results, Random Read IOPS, QD=128.....	12
Table 7: SPDK NVMe-oF TCP Target Core Scaling results, Random Write IOPS, QD=192	13
Table 8: SPDK NVMe-oF TCP Target Core Scaling results, Random Read/Write 70%/30% IOPS, QD=192.....	14
Table 9: SPDK NVMe-oF TCP Target Core Scaling results, 128KB Sequential Read IOPS, QD=8	15
Table 10: SPDK NVMe-oF TCP Target Core Scaling results, 128KB Sequential Write IOPS, QD=8	16
Table 11: SPDK NVMe-oF TCP Target Core Scaling results, 128KB Sequential 70% Read 30% Write IOPS, QD=8	17
Table 12: SPDK NVMe-oF TCP Initiator Core Scaling test configuration	19
Table 13: SPDK NVMe-oF TCP Initiator Core Scaling results, 4KB Random Read IOPS, QD=128	22
Table 14: SPDK NVMe-oF TCP Initiator Core Scaling results, 4KB Random Write IOPS, QD=128	23
Table 15: SPDK NVMe-oF TCP Initiator Core Scaling results, 4KB Random 70%/30% Read/Write IOPS, QD=64	24
Table 16: Linux Kernel vs. SPDK NVMe-oF TCP Latency test configuration	26
Table 17: SPDK NVMe-oF Target Latency and IOPS at QD=1, Null Block Device.....	29
Table 18: Linux Kernel NVMe-oF Target Latency and IOPS at QD=1, Null Block Device	29
Table 19: SPDK NVMe-oF Initiator Latency and IOPS at QD=1, Null Block Device	30
Table 20: Linux Kernel NVMe-oF Initiator Latency and IOPS at QD=1, Null Block Device	30
Table 21: SPDK NVMe-oF Latency and IOPS at QD=1, Null Block Device	31
Table 22: Linux Kernel NVMe-oF Latency and IOPS at QD=1, Null Block Device	31
Table 23: NVMe-oF Performance with increasing number of connections test configuration	33
Table 24: Linux Kernel NVMe-oF TCP Target: 4KB 100% Random Reads, QD=128.....	35
Table 25: SPDK NVMe-oF TCP Target: 4KB 100% Random Reads, QD=128	35
Table 26: Linux Kernel NVMe-oF TCP Target: 4KB 100% Random Writes, QD=128	36
Table 27: SPDK NVMe-oF TCP Target: 4KB 100% Random Writes, QD=128	36
Table 28: Linux Kernel NVMe-oF TCP Target: 4KB 70% Random Read 30% Random Write, QD=128.	37

Table 29: SPDK NVMe-oF TCP Target: 4KB 70% Random Read 30% Random Write, QD=128	37
Table 30: SPDK & Kernel NVMe-oF TCP Target relative efficiency comparison for various workloads, QD=64, 1 connection per subsystem.....	38

Appendix A – Test Case 1 SPDK NVMe-oF Initiator bdev configuration

Initiator system 1

```
{  
    "subsystems": [  
        {  
            "subsystem": "bdev",  
            "config": [  
                {  
                    "method": "bdev_nvme_attach_controller",  
                    "params": {  
                        "name": "Nvme0",  
                        "trtype": "tcp",  
                        "traddr": "20.0.0.1",  
                        "trsvcid": "4420",  
                        "subnqn": "nqn.2018-09.io.spdk:cnode0",  
                        "adrifam": "IPv4"  
                    }  
                },  
                {  
                    "method": "bdev_nvme_attach_controller",  
                    "params": {  
                        "name": "Nvme1",  
                        "trtype": "tcp",  
                        "traddr": "20.0.0.1",  
                        "trsvcid": "4420",  
                        "subnqn": "nqn.2018-09.io.spdk:cnode1",  
                        "adrifam": "IPv4"  
                    }  
                },  
                {  
                    "method": "bdev_nvme_attach_controller",  
                    "params": {  
                        "name": "Nvme2",  
                        "trtype": "tcp",  
                        "traddr": "20.0.0.1",  
                        "trsvcid": "4420",  
                        "subnqn": "nqn.2018-09.io.spdk:cnode2",  
                        "adrifam": "IPv4"  
                    }  
                },  
                {  
                    "method": "bdev_nvme_attach_controller",  
                    "params": {  
                        "name": "Nvme3",  
                        "trtype": "tcp",  
                        "traddr": "20.0.0.1",  
                        "trsvcid": "4420",  
                        "subnqn": "nqn.2018-09.io.spdk:cnode3",  
                        "adrifam": "IPv4"  
                    }  
                }  
            ]  
        }  
    ]  
}
```

```
        },
        {
            "method": "bdev_nvme_attach_controller",
            "params": {
                "name": "Nvme4",
                "trtype": "tcp",
                "traddr": "20.0.1.1",
                "trsvcid": "4420",
                "subnqn": "nqn.2018-09.io.spdk:cnode4",
                "adrifam": "IPv4"
            }
        },
        {
            "method": "bdev_nvme_attach_controller",
            "params": {
                "name": "Nvme5",
                "trtype": "tcp",
                "traddr": "20.0.1.1",
                "trsvcid": "4420",
                "subnqn": "nqn.2018-09.io.spdk:cnode5",
                "adrifam": "IPv4"
            }
        },
        {
            "method": "bdev_nvme_attach_controller",
            "params": {
                "name": "Nvme6",
                "trtype": "tcp",
                "traddr": "20.0.1.1",
                "trsvcid": "4420",
                "subnqn": "nqn.2018-09.io.spdk:cnode6",
                "adrifam": "IPv4"
            }
        },
        {
            "method": "bdev_nvme_attach_controller",
            "params": {
                "name": "Nvme7",
                "trtype": "tcp",
                "traddr": "20.0.1.1",
                "trsvcid": "4420",
                "subnqn": "nqn.2018-09.io.spdk:cnode7",
                "adrifam": "IPv4"
            }
        }
    ]
}
```

Initiator system 2

```
{
    "subsystems": [
        {
            "subsystem": "bdev",
            "config": [
                {

```

```
"method": "bdev_nvme_attach_controller",
"params": {
    "name": "Nvme0",
    "trtype": "tcp",
    "traddr": "10.0.0.1",
    "trsvid": "4420",
    "subnqn": "nqn.2018-09.io.spdk:cnode0",
    "adrifam": "IPv4"
}
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme1",
        "trtype": "tcp",
        "traddr": "10.0.0.1",
        "trsvid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode1",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme2",
        "trtype": "tcp",
        "traddr": "10.0.0.1",
        "trsvid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode2",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme3",
        "trtype": "tcp",
        "traddr": "10.0.0.1",
        "trsvid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode3",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme4",
        "trtype": "tcp",
        "traddr": "10.0.1.1",
        "trsvid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode4",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
```

```

        "name": "Nvme5",
        "trtype": "tcp",
        "traddr": "10.0.1.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode5",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme6",
        "trtype": "tcp",
        "traddr": "10.0.1.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode6",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme7",
        "trtype": "tcp",
        "traddr": "10.0.1.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode7",
        "adrifam": "IPv4"
    }
}
]
}
]
}
}

```

Appendix B – Test Case 2 SPDK NVMe-oF Initiator bdev

configuration

```
{
    "subsystems": [
        {
            "subsystem": "bdev",
            "config": [
                {
                    "method": "bdev_nvme_attach_controller",
                    "params": {
                        "name": "Nvme0",
                        "trtype": "tcp",
                        "traddr": "20.0.0.1",
                        "trsvcid": "4420",
                        "subnqn": "nqn.2018-09.io.spdk:cnode0",
                        "adrifam": "IPv4"
                    }
                },
                {

```

```
"method": "bdev_nvme_attach_controller",
"params": {
    "name": "Nvme1",
    "trtype": "tcp",
    "traddr": "20.0.0.1",
    "trsvcid": "4420",
    "subnqn": "nqn.2018-09.io.spdk:cnode1",
    "adrifam": "IPv4"
}
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme2",
        "trtype": "tcp",
        "traddr": "20.0.0.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode2",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme3",
        "trtype": "tcp",
        "traddr": "20.0.0.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode3",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme4",
        "trtype": "tcp",
        "traddr": "20.0.0.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode4",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme5",
        "trtype": "tcp",
        "traddr": "20.0.0.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode5",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
```

```

        "name": "Nvme6",
        "trtype": "tcp",
        "traddr": "20.0.0.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode6",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme7",
        "trtype": "tcp",
        "traddr": "20.0.0.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode7",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme8",
        "trtype": "tcp",
        "traddr": "20.0.1.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode8",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme9",
        "trtype": "tcp",
        "traddr": "20.0.1.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode9",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme10",
        "trtype": "tcp",
        "traddr": "20.0.1.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode10",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme11",
        "trtype": "tcp",

```

```

        "traddr": "20.0.1.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode11",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme12",
        "trtype": "tcp",
        "traddr": "20.0.1.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode12",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme13",
        "trtype": "tcp",
        "traddr": "20.0.1.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode13",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme14",
        "trtype": "tcp",
        "traddr": "20.0.1.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode14",
        "adrifam": "IPv4"
    }
},
{
    "method": "bdev_nvme_attach_controller",
    "params": {
        "name": "Nvme15",
        "trtype": "tcp",
        "traddr": "20.0.1.1",
        "trsvcid": "4420",
        "subnqn": "nqn.2018-09.io.spdk:cnode15",
        "adrifam": "IPv4"
    }
}
]
}
]
```

Appendix C – Test Case 3 SPDK NVMe-oF Initiator bdev configuration

```
{  
    "subsystems": [  
        {  
            "subsystem": "bdev",  
            "config": [  
                {  
                    "method": "bdev_nvme_attach_controller",  
                    "params": {  
                        "name": "Nvme0",  
                        "trtype": "tcp",  
                        "traddr": "20.0.0.1",  
                        "trsvcid": "4420",  
                        "subnqn": "nqn.2018-09.io.spdk:cnode0",  
                        "adrifam": "IPv4"  
                    }  
                }  
            ]  
        }  
    ]  
}
```

Appendix D – Kernel NVMe-oF TCP Target configuration

Example Kernel NVMe-oF TCP Target configuration for Test Case 4.

```
{  
    "ports": [  
        {  
            "addr": {  
                "adrifam": "ipv4",  
                "traddr": "20.0.0.1",  
                "trsvcid": "4420",  
                "trtype": "tcp"  
            },  
            "portid": 1,  
            "referrals": [],  
            "subsystems": [  
                "nqn.2018-09.io.spdk:cnode1"  
            ]  
        },  
        {  
            "addr": {  
                "adrifam": "ipv4",  
                "traddr": "20.0.0.1",  
                "trsvcid": "4421",  
                "trtype": "tcp"  
            },  
            "portid": 2,  
            "referrals": [],  
            "subsystems": [  
                "nqn.2018-09.io.spdk:cnode2"  
            ]  
        }  
    ]  
}
```

```

        ],
    },
    {
        "addr": {
            "adrfam": "ipv4",
            "traddr": "20.0.0.1",
            "trsvcid": "4422",
            "trtype": "tcp"
        },
        "portid": 3,
        "referrals": [],
        "subsystems": [
            "nqn.2018-09.io.spdk:cnode3"
        ]
    },
    {
        "addr": {
            "adrfam": "ipv4",
            "traddr": "20.0.0.1",
            "trsvcid": "4423",
            "trtype": "tcp"
        },
        "portid": 4,
        "referrals": [],
        "subsystems": [
            "nqn.2018-09.io.spdk:cnode4"
        ]
    },
    {
        "addr": {
            "adrfam": "ipv4",
            "traddr": "20.0.1.1",
            "trsvcid": "4424",
            "trtype": "tcp"
        },
        "portid": 5,
        "referrals": [],
        "subsystems": [
            "nqn.2018-09.io.spdk:cnode5"
        ]
    },
    {
        "addr": {
            "adrfam": "ipv4",
            "traddr": "20.0.1.1",
            "trsvcid": "4425",
            "trtype": "tcp"
        },
        "portid": 6,
        "referrals": [],
        "subsystems": [
            "nqn.2018-09.io.spdk:cnode6"
        ]
    },
    {
        "addr": {
            "adrfam": "ipv4",

```

```
        "traddr": "20.0.1.1",
        "trsvcid": "4426",
        "trtype": "tcp"
    },
    "portid": 7,
    "referrals": [],
    "subsystems": [
        "nqn.2018-09.io.spdk:cnode7"
    ]
},
{
    "addr": {
        "adrfam": "ipv4",
        "traddr": "20.0.1.1",
        "trsvcid": "4427",
        "trtype": "tcp"
    },
    "portid": 8,
    "referrals": [],
    "subsystems": [
        "nqn.2018-09.io.spdk:cnode8"
    ]
},
{
    "addr": {
        "adrfam": "ipv4",
        "traddr": "10.0.0.1",
        "trsvcid": "4428",
        "trtype": "tcp"
    },
    "portid": 9,
    "referrals": [],
    "subsystems": [
        "nqn.2018-09.io.spdk:cnode9"
    ]
},
{
    "addr": {
        "adrfam": "ipv4",
        "traddr": "10.0.0.1",
        "trsvcid": "4429",
        "trtype": "tcp"
    },
    "portid": 10,
    "referrals": [],
    "subsystems": [
        "nqn.2018-09.io.spdk:cnode10"
    ]
},
{
    "addr": {
        "adrfam": "ipv4",
        "traddr": "10.0.0.1",
        "trsvcid": "4430",
        "trtype": "tcp"
    },
    "portid": 11,
```

```
"referrals": [],
"subsystems": [
    "nqn.2018-09.io.spdk:cnode11"
]
},
{
    "addr": {
        "adrfam": "ipv4",
        "traddr": "10.0.0.1",
        "trsvid": "4431",
        "trtype": "tcp"
    },
    "portid": 12,
    "referrals": [],
    "subsystems": [
        "nqn.2018-09.io.spdk:cnode12"
    ]
},
{
    "addr": {
        "adrfam": "ipv4",
        "traddr": "10.0.1.1",
        "trsvid": "4432",
        "trtype": "tcp"
    },
    "portid": 13,
    "referrals": [],
    "subsystems": [
        "nqn.2018-09.io.spdk:cnode13"
    ]
},
{
    "addr": {
        "adrfam": "ipv4",
        "traddr": "10.0.1.1",
        "trsvid": "4433",
        "trtype": "tcp"
    },
    "portid": 14,
    "referrals": [],
    "subsystems": [
        "nqn.2018-09.io.spdk:cnode14"
    ]
},
{
    "addr": {
        "adrfam": "ipv4",
        "traddr": "10.0.1.1",
        "trsvid": "4434",
        "trtype": "tcp"
    },
    "portid": 15,
    "referrals": [],
    "subsystems": [
        "nqn.2018-09.io.spdk:cnode15"
    ]
},
```

```
{  
    "addr": {  
        "adrfam": "ipv4",  
        "traddr": "10.0.1.1",  
        "trsvcid": "4435",  
        "trtype": "tcp"  
    },  
    "portid": 16,  
    "referrals": [],  
    "subsystems": [  
        "nqn.2018-09.io.spdk:cnode16"  
    ]  
}  
],  
"hosts": [],  
"subsystems": [  
    {  
        "allowed_hosts": [],  
        "attr": {  
            "allow_any_host": "1",  
            "version": "1.3"  
        },  
        "namespaces": [  
            {  
                "device": {  
                    "path": "/dev/nvme0n1",  
                    "uuid": "b53be81d-6f5c-4768-b3bd-203614d8cf20"  
                },  
                "enable": 1,  
                "nsid": 1  
            }  
        ],  
        "nqn": "nqn.2018-09.io.spdk:cnode1"  
    },  
    {  
        "allowed_hosts": [],  
        "attr": {  
            "allow_any_host": "1",  
            "version": "1.3"  
        },  
        "namespaces": [  
            {  
                "device": {  
                    "path": "/dev/nvme1n1",  
                    "uuid": "12fcf584-9c45-4b6b-abc9-63a763455cf7"  
                },  
                "enable": 1,  
                "nsid": 2  
            }  
        ],  
        "nqn": "nqn.2018-09.io.spdk:cnode2"  
    },  
    {  
        "allowed_hosts": [],  
        "attr": {  
            "allow_any_host": "1",  
            "version": "1.3"  
        },  
        "namespaces": [  
            {  
                "device": {  
                    "path": "/dev/nvme2n1",  
                    "uuid": "34343434-3434-4343-3434-343434343434"  
                },  
                "enable": 1,  
                "nsid": 3  
            }  
        ],  
        "nqn": "nqn.2018-09.io.spdk:cnode3"  
    }  
]
```

```
        },
        "namespaces": [
            {
                "device": {
                    "path": "/dev/nvme2n1",
                    "uuid": "ceae8569-69e9-4831-8661-90725bdf768d"
                },
                "enable": 1,
                "nsid": 3
            }
        ],
        "nqn": "nqn.2018-09.io.spdk:cnode3"
    },
    {
        "allowed_hosts": [],
        "attr": {
            "allow_any_host": "1",
            "version": "1.3"
        },
        "namespaces": [
            {
                "device": {
                    "path": "/dev/nvme3n1",
                    "uuid": "39f36db4-2cd5-4f69-b37d-1192111d52a6"
                },
                "enable": 1,
                "nsid": 4
            }
        ],
        "nqn": "nqn.2018-09.io.spdk:cnode4"
    },
    {
        "allowed_hosts": [],
        "attr": {
            "allow_any_host": "1",
            "version": "1.3"
        },
        "namespaces": [
            {
                "device": {
                    "path": "/dev/nvme4n1",
                    "uuid": "984aed55-90ed-4517-ae36-d3afb92dd41f"
                },
                "enable": 1,
                "nsid": 5
            }
        ],
        "nqn": "nqn.2018-09.io.spdk:cnode5"
    },
    {
        "allowed_hosts": [],
        "attr": {
            "allow_any_host": "1",
            "version": "1.3"
        },
        "namespaces": [
            {

```

```

        "device": {
            "path": "/dev/nvme5n1",
            "uuid": "d6d16e74-378d-40ad-83e7-b8d8af3d06a6"
        },
        "enable": 1,
        "nsid": 6
    },
],
"nqn": "nqn.2018-09.io.spdk:cnode6"
},
{
    "allowed_hosts": [],
    "attr": {
        "allow_any_host": "1",
        "version": "1.3"
    },
    "namespaces": [
        {
            "device": {
                "path": "/dev/nvme6n1",
                "uuid": "a65dc00e-d35c-4647-9db6-c2a8d90db5e8"
            },
            "enable": 1,
            "nsid": 7
        }
    ],
    "nqn": "nqn.2018-09.io.spdk:cnode7"
},
{
    "allowed_hosts": [],
    "attr": {
        "allow_any_host": "1",
        "version": "1.3"
    },
    "namespaces": [
        {
            "device": {
                "path": "/dev/nvme7n1",
                "uuid": "1b242cb7-8e47-4079-a233-83e2cd47c86c"
            },
            "enable": 1,
            "nsid": 8
        }
    ],
    "nqn": "nqn.2018-09.io.spdk:cnode8"
},
{
    "allowed_hosts": [],
    "attr": {
        "allow_any_host": "1",
        "version": "1.3"
    },
    "namespaces": [
        {
            "device": {
                "path": "/dev/nvme8n1",
                "uuid": "f12bb0c9-a2c6-4eef-a94f-5c4887bbf77f"
            }
        }
    ]
}

```

```

        },
        "enable": 1,
        "nsid": 9
    },
],
"nqn": "nqn.2018-09.io.spdk:cnode9"
},
{
    "allowed_hosts": [],
    "attr": {
        "allow_any_host": "1",
        "version": "1.3"
    },
    "namespaces": [
        {
            "device": {
                "path": "/dev/nvme9n1",
                "uuid": "40fae536-227b-47d2-bd74-8ab76ec7603b"
            },
            "enable": 1,
            "nsid": 10
        }
    ],
    "nqn": "nqn.2018-09.io.spdk:cnode10"
},
{
    "allowed_hosts": [],
    "attr": {
        "allow_any_host": "1",
        "version": "1.3"
    },
    "namespaces": [
        {
            "device": {
                "path": "/dev/nvme10n1",
                "uuid": "b9756b86-263a-41cf-a68c-5cfb23c7a6eb"
            },
            "enable": 1,
            "nsid": 11
        }
    ],
    "nqn": "nqn.2018-09.io.spdk:cnode11"
},
{
    "allowed_hosts": [],
    "attr": {
        "allow_any_host": "1",
        "version": "1.3"
    },
    "namespaces": [
        {
            "device": {
                "path": "/dev/nvme11n1",
                "uuid": "9d7e74cc-97f3-40fb-8e90-f2d02b5fff4c"
            },
            "enable": 1,
            "nsid": 12
        }
    ]
}

```

```
        }
    ],
    "nqn": "nqn.2018-09.io.spdk:cnode12"
},
{
    "allowed_hosts": [],
    "attr": {
        "allow_any_host": "1",
        "version": "1.3"
    },
    "namespaces": [
        {
            "device": {
                "path": "/dev/nvme12n1",
                "uuid": "d3f4017b-4f7d-454d-94a9-ea75ffc7436d"
            },
            "enable": 1,
            "nsid": 13
        }
    ],
    "nqn": "nqn.2018-09.io.spdk:cnode13"
},
{
    "allowed_hosts": [],
    "attr": {
        "allow_any_host": "1",
        "version": "1.3"
    },
    "namespaces": [
        {
            "device": {
                "path": "/dev/nvme13n1",
                "uuid": "6b9a65a3-6557-4713-8bad-57d9c5cb17a9"
            },
            "enable": 1,
            "nsid": 14
        }
    ],
    "nqn": "nqn.2018-09.io.spdk:cnode14"
},
{
    "allowed_hosts": [],
    "attr": {
        "allow_any_host": "1",
        "version": "1.3"
    },
    "namespaces": [
        {
            "device": {
                "path": "/dev/nvme14n1",
                "uuid": "ed69ba4d-8727-43bd-894a-7b08ade4f1b1"
            },
            "enable": 1,
            "nsid": 15
        }
    ],
    "nqn": "nqn.2018-09.io.spdk:cnode15"
```

```
    },
    {
        "allowed_hosts": [],
        "attr": {
            "allow_any_host": "1",
            "version": "1.3"
        },
        "namespaces": [
            {
                "device": {
                    "path": "/dev/nvme15n1",
                    "uuid": "5b8e9af4-0ab4-47fb-968f-b13e4b607f4e"
                },
                "enable": 1,
                "nsid": 16
            }
        ],
        "nqn": "nqn.2018-09.io.spdk:cnode16"
    }
]
```

Notices & Disclaimers

Performance varies by use, configuration and other factors. Learn more at www.Intel.com/PerformanceIndex.

Performance results are based on testing as of dates shown in configurations and may not reflect all publicly available updates.

Your costs and results may vary.

No product or component can be absolutely secure.

Intel technologies may require enabled hardware, software or service activation.

© Intel Corporation. Intel, the Intel logo, and other Intel marks are trademarks of Intel Corporation or its subsidiaries. Other names and brands may be claimed as the property of others.

§